



A MITEL
PRODUCT
GUIDE

MiContact Center Enterprise

OAS Client Programming Guide – Getting Started

Release 9.8

Document Version 1.0

August 2025

Notices

The information contained in this document is believed to be accurate in all respects but is not warranted by **Mitel Networks™ Corporation (MITEL®)**.

The information is subject to change without notice and should not be construed in any way as a commitment by Mitel or any of its affiliates or subsidiaries. Mitel and its affiliates and subsidiaries assume no responsibility for any errors or omissions in this document. Revisions of this document or new editions of it may be issued to incorporate such changes. No part of this document can be reproduced or transmitted in any form or by any means - electronic or mechanical - for any purpose without written permission from Mitel Networks Corporation.

Trademarks

The trademarks, service marks, logos and graphics (collectively "Trademarks") appearing on Mitel's Internet sites or in its publications are registered and unregistered trademarks of Mitel Networks Corporation (MNC) or its subsidiaries (collectively "Mitel") or others. Use of the Trademarks is prohibited without the express consent from Mitel. Please contact our legal department at legal@mitel.com for additional information. For a list of the worldwide Mitel

Networks Corporation registered trademarks, please refer to the website:

<http://www.mitel.com/trademarks>.

®,™ Trademark of Mitel Networks Corporation

© Copyright 2025, Mitel Networks Corporation All rights reserved

GETTING STARTED..... 4

SDK INSTALLATION 4

 Default Path for SDK5

BINARIES 5

HEADER FILES 6

GUIDELINES FOR IMPLEMENTATION 7

 Dynamic Linking (* Recommended).....7

 Static Linking8


GETTING STARTED

Open Application Server (OAS) provides call and media control APIs for third party applications. This document provides information on binary files and header files that are required to program client applications to OAS.

SDK INSTALLATION

The SDK installation installs the required header files and binary files for development of OAS client applications.

You can choose to install SDK by selecting custom installation mode option in the OAS installation as described below.

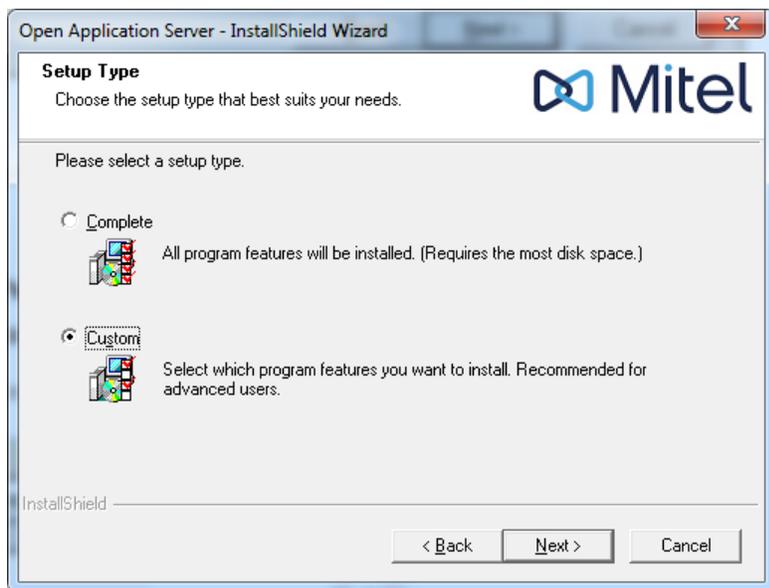


Click **Next**. On the next screen, select the OAS Software development Kit option.

DEFAULT PATH FOR SDK

SDK will be installed in the following default path

%Installation Path% Program files/Mitel/OAS/SDK

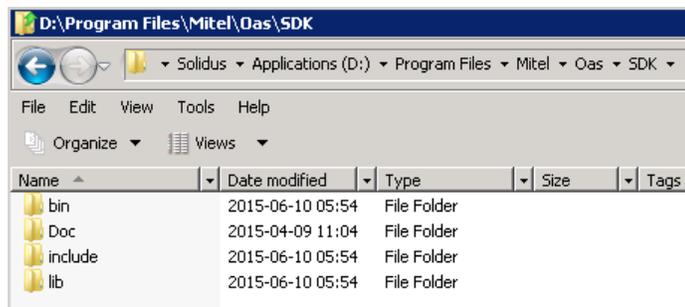

BINARIES

The client application needs to integrate with *oascsta32.dll* to get the Open Application Server API's.

oascsta32.dll is provided in the following path

C:/Program files/Commonfiles/Ericssonshare/

%Installation Path% Program files/Mitel/OAS/SDK/bin

Complete OAS installation also installs SDK.

oascsta32.dll depends on following binaries during runtime

conclnt.dll

conmgr.dll

connstubs.dll

dnacomm.dll

etpclasses.dll

etpclient.dll

npclient.dll

nrmconnclient.dll

qconmgr.dll

qstreams.dll

thrmgr.dll

All these binaries are provided in following path

C:/Program files/Commonfiles/Ericssonshare/

The file versions of some of npclient.dll does not follow OAS version numbering. The file version of npclient.dll is 4.0.3.0.

Ensure that the file version numbers are correct.

Example: If client application is connecting to OAS 9.2, the DLLs should have following file versions.

DLL Name	Version Number
connstubs.dll	9.2.87.0
etpclasses.dll	9.2.87.0
etpclient.dll	9.2.87.0
nrmconnclient.dll	9.2.87.0
oascsta32.dll	9.2.87.0

Note1: Use load library to load the *oascsta32.dll* in client application

HEADER FILES

The following header files should be included in client application program:

1. *csta.h*: for call control
2. *etp.h*: for media control

These header files along with their dependent files are provided in the following path:

%Installation Path% Program files/Mitel/OAS/SDK/include

- *acs.h*
- *acsdefs.h*
- *acslimit.h*
- *cdi.h*
- *cstadevs.h*
- *drvdefs.h*
- *etpdefs.h*
- *etpmediadevs.h*
- *sdb.h*
- *sdbdefs.h*
- *tdi.h*
- *tdrvr.h*
- *tsplatm.h*

GUIDELINES FOR IMPLEMENTATION

Client can load *oascsta32.dll* in following ways

- Dynamic Linking using Load Library (* Recommended)
- Static Linking

DYNAMIC LINKING (* RECOMMENDED)

Use load library API to load *oascsta32.dll*.

Refer the below link to find more information on LoadLibrary .

[http://msdn.microsoft.com/en-us/library/ms684175\(VS.85\).aspx](http://msdn.microsoft.com/en-us/library/ms684175(VS.85).aspx)

Sample Code:

The client application needs to declare a function pointer to respective API functions.

```
typedef RetCode_t
(* acsOpenStream_t) (
    ACSHandle_t          FAR    *acsHandle,
    InvokeIDType_t      FAR    invokeIDType,
    InvokeID_t           FAR    invokeID,
    StreamType_t        FAR    streamType,
    ServerID_t           FAR    *serverID,
    LoginID_t           FAR    *loginID,
    Passwd_t            FAR    *passwd,
    AppName_t           FAR    *applicationName,
    Level_t             FAR    acsLevelReq,
    Version_t           FAR    *apiVer,
    unsigned short      FAR    sendQSize,
    unsigned short      FAR    sendExtraBufs,
    unsigned short      FAR    recvQSize,
    unsigned short      FAR    recvExtraBufs,
    PrivateData_t       FAR    *priv);
```

Fetch the function pointers of *oascsta32.dll* APIs as following

```
HINSTANCE hInstance;
hInstance = LoadLibrary(L"oascsta32.dll");
OpenStream = (acsOpenStream_t)GetProcAddress(hInstance, "acsOpenStream");
//In the same way declare the relevant structures
//and call the appropriate functions in the following way
GetEventBlock = (acsGetEventBlock_t) GetProcAddress(hInstance,
                                                    "acsGetEventBlock");
MonitorDevice = (cstaMonitorDevice_t) GetProcAddress(hInstance,
                                                    "cstaMonitorDevice");
MakeCall = (cstaMakeCall_t) GetProcAddress(hInstance, "cstaMakeCall");
```

For more details on the structures of requests and responses refer to *oasapg.pdf* which we can found in the following path

`%Installation Path% Program Files\Mitel\OAS\SDK\Doc`

STATIC LINKING

csta32.lib can be included in the client program for static linking.

Client application needs to be recompiled to work with updated version of *csta32.lib* file. The lib file is provided at the following path:

`%Installation Path% Program Files\Mitel\OAS\SDK\lib`

This option is not recommended.