OpenScape Xpressions V7 PhoneMail
Function Tree Octel-like-Menü
Brief function overview of the Simple Mode for greeting recording (Page 1 of 2)

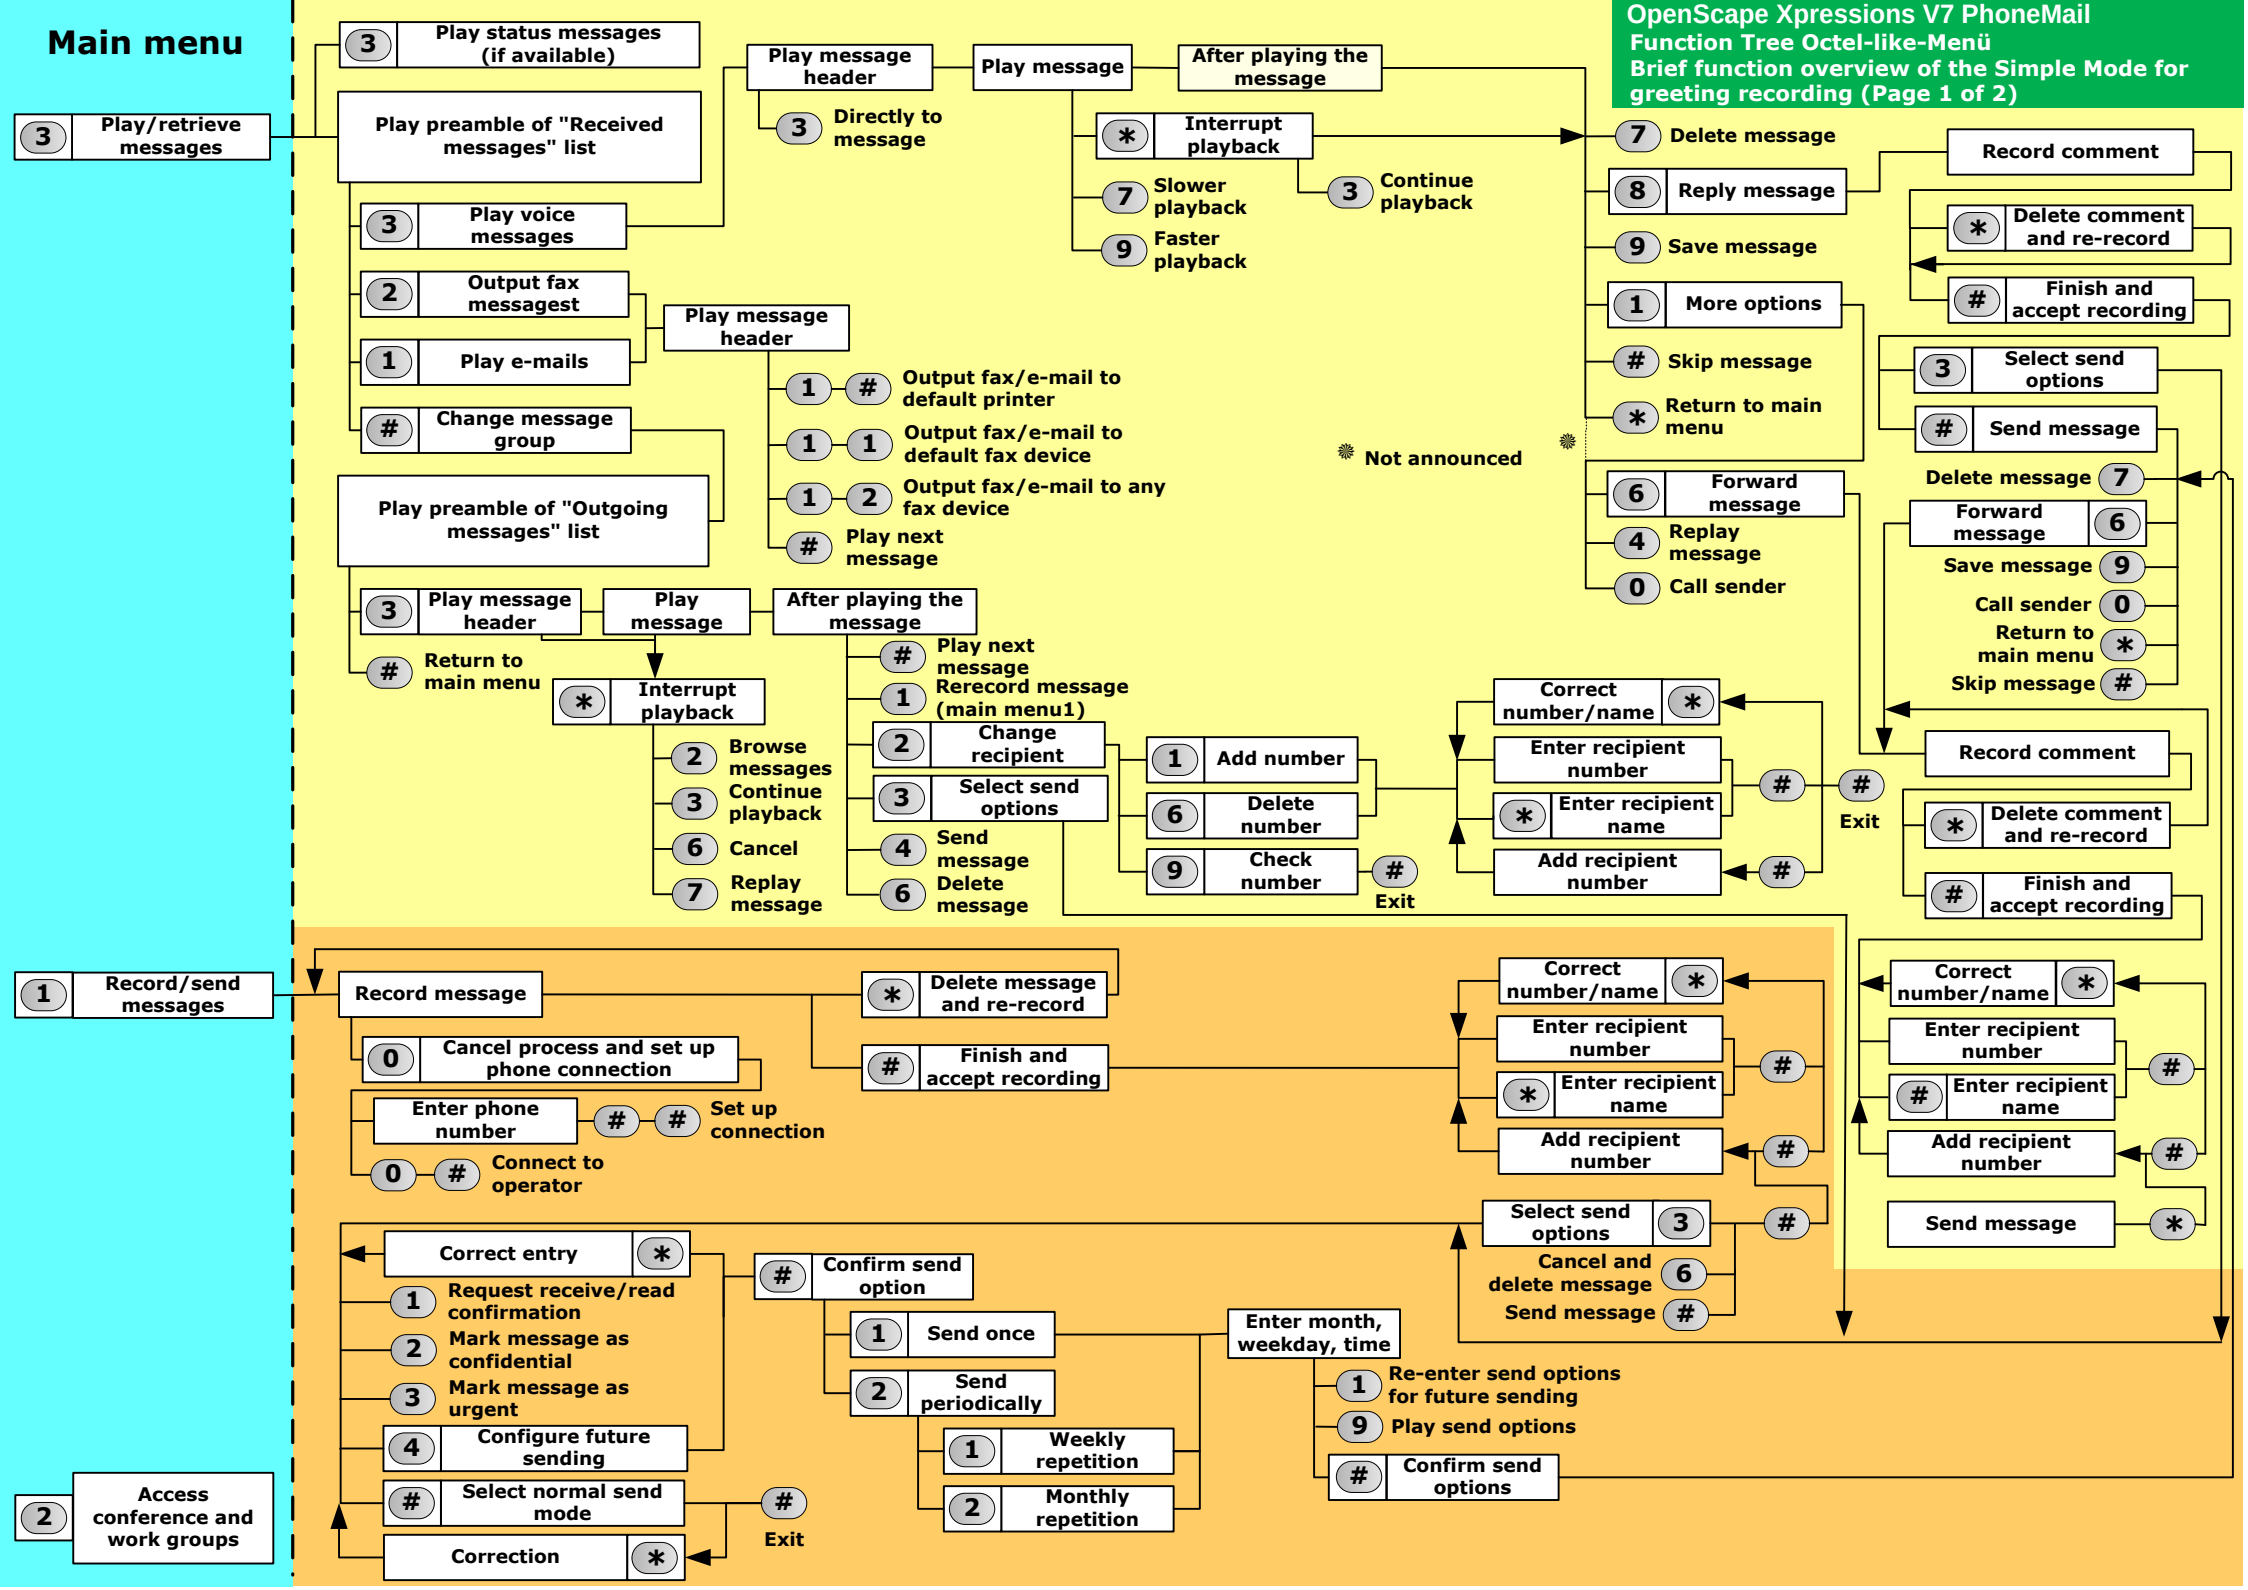

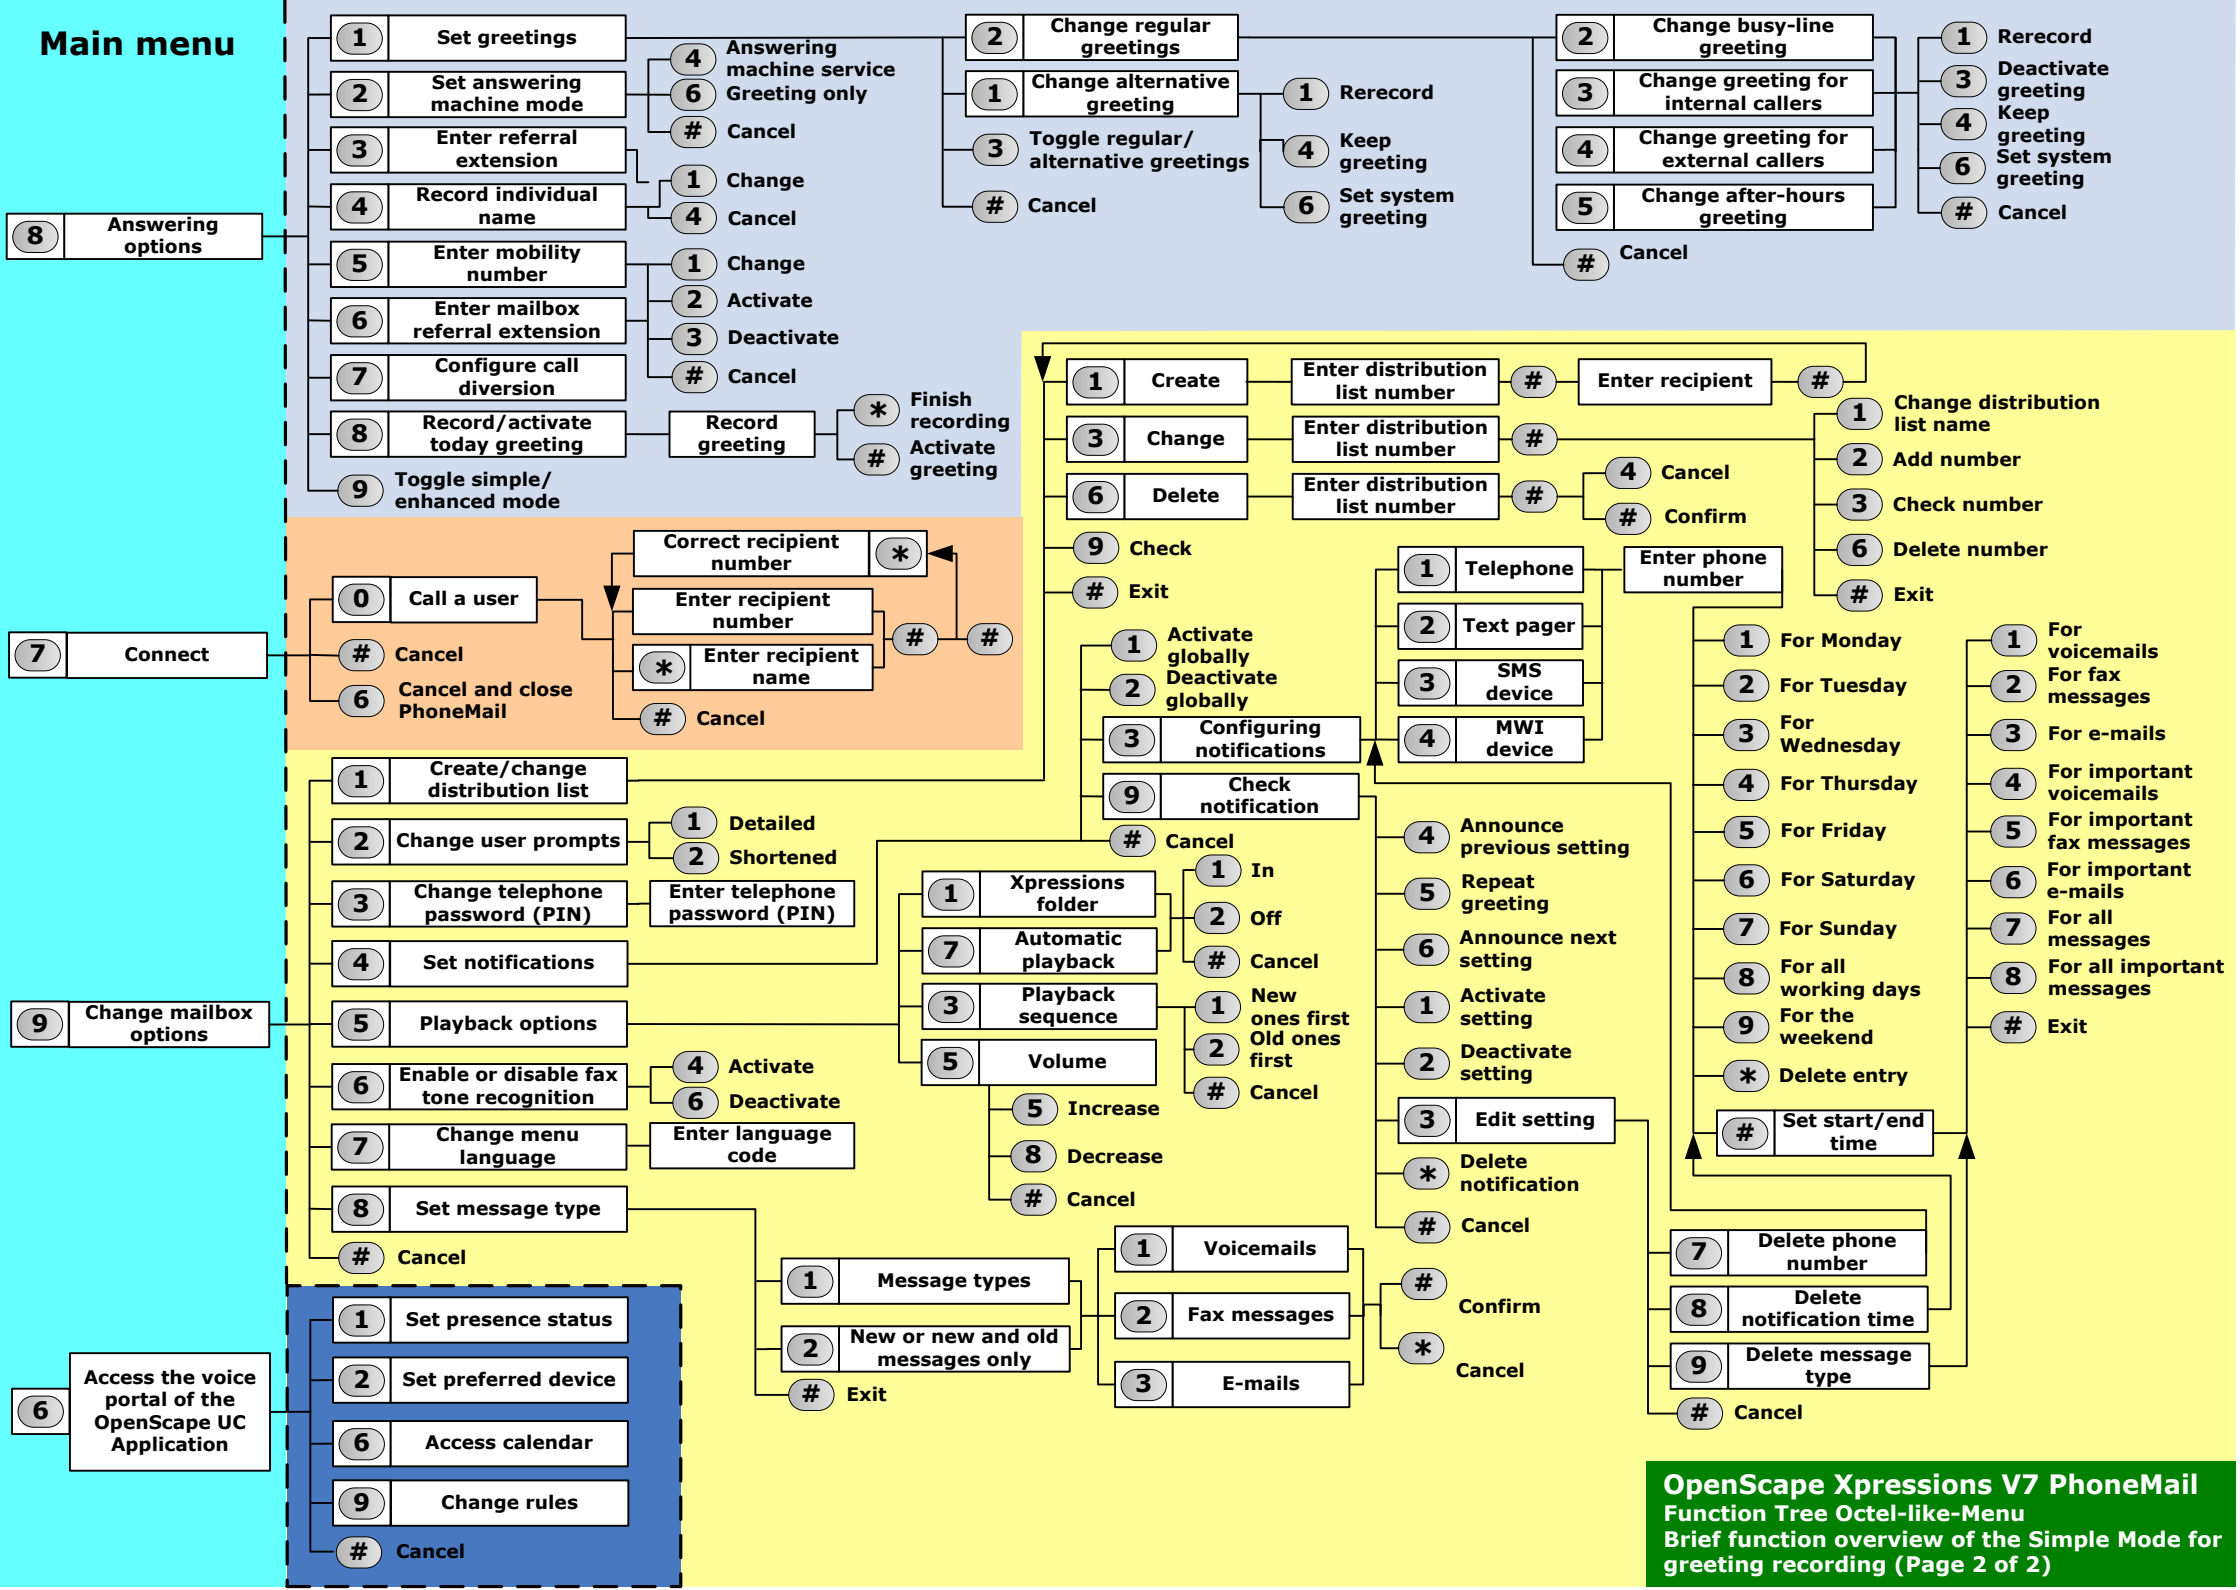
Main menu
8 Answering options
1 Set greetings
4 Answering machine service
6 Greeting only
Cancel
2 Set answering machine mode
3 Enter referral extension
4 Record individual name
1 Change
4 Cancel
5 Enter mobility number
1 Change
2 Activate
3 Deactivate
Cancel
6 Enter mailbox referral extension
7 Configure call diversion
8 Record/activate today greeting
Record greeting
* Finish recording
# Activate greeting
9 Toggle simple/ enhanced mode
2 Change regular greetings
1 Change alternative greeting
1 Rerecord
4 Keep greeting
6 Set system greeting
3 Toggle regular/ alternative greetings
Cancel
2 Change busy-line greeting
3 Change greeting for internal callers
4 Change greeting for external callers
5 Change after-hours greeting
Cancel
1 Rerecord
3 Deactivate greeting
4 Keep greeting
6 Set system greeting
Cancel
7 Connect
0 Call a user
Correct recipient number *
Enter recipient number
* Enter recipient name
# Cancel
# #
# Cancel
6 Cancel and close PhoneMail
9 Change mailbox options
1 Create/change distribution list
1 Create
Enter distribution list number #
Enter recipient #
3 Change
Enter distribution list number #
6 Delete
Enter distribution list number #
4 Cancel
Confirm
9 Check
Exit
1 Change distribution list name
2 Add number
3 Check number
6 Delete number
Exit
2 Change user prompts
1 Detailed
2 Shortened
3 Change telephone password (PIN)
Enter telephone password (PIN)
4 Set notifications
1 Activate globally
2 Deactivate globally
3 Configuring notifications
9 Check notification
Cancel
1 Telephone
2 Text pager
3 SMS device
4 MWI device
Enter phone number
5 Playback options
1 Xpressions folder
1 In
2 Off
Cancel
7 Automatic playback
3 Playback sequence
1 New ones first
2 Old ones first
Cancel
5 Volume
5 Increase
8 Decrease
Cancel
4 Announce previous setting
5 Repeat greeting
6 Announce next setting
1 Activate setting
2 Deactivate setting
3 Edit setting
* Delete notification
# Cancel
1 For Monday
2 For Tuesday
3 For Wednesday
4 For Thursday
5 For Friday
6 For Saturday
7 For Sunday
8 For all working days
9 For the weekend
* Delete entry
# Set start/end time
1 For voicemails
2 For fax messages
3 For e-mails
4 For important voicemails
5 For important fax messages
6 For important e-mails
7 For all messages
8 For all important messages
Exit
6 Enable or disable fax tone recognition
4 Activate
6 Deactivate
7 Change menu language
Enter language code
8 Set message type
1 Message types
1 Voicemails
2 Fax messages
3 E-mails
Confirm
* Cancel
2 New or new and old messages only
Exit
Cancel
7 Delete phone number
8 Delete notification time
9 Delete message type
Cancel
6 Access the voice portal of the OpenScape UC Application
1 Set presence status
2 Set preferred device
6 Access calendar
9 Change rules
Cancel
OpenScape Xpressions V7 PhoneMail
Function Tree Octel-like-Menu
Brief function overview of the Simple Mode for greeting recording (Page 2 of 2)

OpenScape Xpressions V7 PhoneMail

Function Tree Octel-like-Menü

Brief function overview of the Enhanced Mode for greeting recording (Page 1 of 2)

Main menu

- 3 Play/retrieve messages
- 1 Record/send messages
- 2 Access conference and work groups

3 Play/retrieve messages

- 3 Play status messages (if available)
- Play preamble of "Received messages" list
  - 3 Play voice messages
    - Play message header
      - 3 Directly to message
    - Play message
      - * Interrupt playback
        - 3 Continue playback
      - 7 Slower playback
      - 9 Faster playback
    - After playing the message
      - 7 Delete message
      - 8 Reply message
        - Record comment
        - * Delete comment and re-record
        - # Finish and accept recording
      - 9 Save message
      - 1 More options
        - 3 Select send options
        - # Send message
        - Delete message 7
        - Forward message 6
        - Save message 9
        - Call sender 0
        - Return to main menu *
        - Skip message #
      - # Skip message
      - * Return to main menu
  - 2 Output fax messagest
    - Play message header
      - 1 # Output fax/e-mail to default printer
      - 1 1 Output fax/e-mail to default fax device
      - 1 2 Output fax/e-mail to any fax device
      - # Play next message
  - 1 Play e-mails
  - # Change message group
- Play preamble of "Outgoing messages" list
  - 3 Play message header
    - # Return to main menu
  - Play message
    - * Interrupt playback
      - 2 Browse messages
      - 3 Continue playback
      - 6 Cancel
      - 7 Replay message
  - After playing the message
    - # Play next message
    - 1 Rerecord message (main menu1)
    - 2 Change recipient
      - 1 Add number
      - 6 Delete number
      - 9 Check number
        - # Exit
      - Correct number/name *
      - Enter recipient number
      - * Enter recipient name
      - Add recipient number
      - # # Exit
    - 3 Select send options
      - Record comment
      - * Delete comment and re-record
      - # Finish and accept recording
    - 4 Send message
    - 6 Delete message

Not announced

- 6 Forward message
- 4 Replay message
- 0 Call sender

1 Record/send messages

- Record message
  - * Delete message and re-record
  - # Finish and accept recording
    - Correct number/name *
    - Enter recipient number
    - * Enter recipient name
    - Add recipient number
    - # # Exit
    - Select send options 3
      - Cancel and delete message 6
      - Send message #
    - Correct number/name *
    - Enter recipient number
    - # Enter recipient name
    - Add recipient number
    - Send message *
- 0 Cancel process and set up phone connection
  - Enter phone number # # Set up connection
  - 0 # Connect to operator

2 Access conference and work groups

- Correct entry *
- 1 Request receive/read confirmation
- 2 Mark message as confidential
- 3 Mark message as urgent
- 4 Configure future sending
- # Select normal send mode
- Correction *
- # Exit
- # Confirm send option
  - 1 Send once
    - Enter month, weekday, time
      - 1 Re-enter send options for future sending
      - 9 Play send options
      - # Confirm send options
  - 2 Send periodically
    - 1 Weekly repetition
    - 2 Monthly repetition

Main menu

- 8 Answering options
  - 1 Set greetings
    - 1 Change alternative greeting
      - 1 Change greeting → Enter greeting number → 1 Re-record → * Stop recording → # Finish recording and activate greeting
      - 4 Answering machine service
        - 1 Re-record → * Stop recording → # Finish recording and activate greeting
        - 4 Keep greeting
        - 6 Set system greeting
      - 6 Greeting only
        - 1 Re-record → * Stop recording → # Finish recording and activate greeting
        - 4 Keep greeting
        - 6 Set system greeting
      - 3 Switch off
      - # Exit
    - 2 Change busy-line greeting
      - 1 Re-record → * Stop recording → # Finish recording and activate greeting
      - 4 Keep greeting
      - 6 Set system greeting
    - 3 Change greeting for internal callers
      - 1 Re-record → * Stop recording → # Finish recording and activate greeting
      - 4 Keep greeting
      - 6 Set system greeting
    - 4 Change greeting for external callers
      - 1 Re-record → * Stop recording → # Finish recording and activate greeting
      - 4 Keep greeting
      - 6 Set system greeting
    - 5 Change after-hours greeting
      - 1 Re-record → * Stop recording → # Finish recording and activate greeting
      - 4 Keep greeting
      - 6 Set system greeting
    - # Cancel
  - 3 Enter referral extension
    - 1 Change
    - 4 Cancel
  - 4 Record individual name
    - 1 Change
    - 4 Cancel
  - 5 Enter mobility number
    - 1 Change
    - 2 Activate
    - 3 Deactivate
    - # Cancel
  - 6 Enter mailbox referral extension
    - 1 Change
    - 2 Activate
    - 3 Deactivate
    - # Cancel
  - 7 Configure call diversion
  - 8 Record/activate today greeting → Record greeting
    - * Finish recording
    - # Activate greeting
  - 9 Toggle simple/ enhanced mode
- 7 Connect
  - 0 Call a user
    - Correct recipient number → *
    - Enter recipient number → # → #
    - * Enter recipient name
    - # Cancel
  - # Cancel
  - 6 Cancel and close PhoneMail
- 9 Change mailbox options
  - 1 Create/change distribution list
    - 1 Create → Enter distribution list number → # → Enter recipient → #
    - 3 Change → Enter distribution list number → #
      - 1 Change distribution list name
      - 2 Add number
      - 3 Check number
      - 6 Delete number
      - # Exit
    - 6 Delete → Enter distribution list number → #
      - 4 Cancel
      - # Confirm
    - 9 Check
    - # Exit
  - 2 Change the user prompts
    - 1 Detailed
    - 2 Shortened
  - 3 Change telephone password (PIN) → Enter telephone password (PIN)
  - 4 Set notifications
    - 1 Activate globally
    - 2 Deactivate globally
    - 3 Configure notifications
      - 1 Telephone → Enter phone number
        - 1 For Monday
        - 2 For Tuesday
        - 3 For Wednesday
        - 4 For Thursday
        - 5 For Friday
        - 6 For Saturday
        - 7 For Sunday
        - 8 For all working days
        - 9 For the weekend
        - * Delete entry
        - # Set start/end time
      - 2 Text pager → Enter phone number
        - 1 For Monday
        - 2 For Tuesday
        - 3 For Wednesday
        - 4 For Thursday
        - 5 For Friday
        - 6 For Saturday
        - 7 For Sunday
        - 8 For all working days
        - 9 For the weekend
        - * Delete entry
        - # Set start/end time
      - 3 SMS device → Enter phone number
        - 1 For Monday
        - 2 For Tuesday
        - 3 For Wednesday
        - 4 For Thursday
        - 5 For Friday
        - 6 For Saturday
        - 7 For Sunday
        - 8 For all working days
        - 9 For the weekend
        - * Delete entry
        - # Set start/end time
      - 4 MWI device → Enter phone number
        - 1 For Monday
        - 2 For Tuesday
        - 3 For Wednesday
        - 4 For Thursday
        - 5 For Friday
        - 6 For Saturday
        - 7 For Sunday
        - 8 For all working days
        - 9 For the weekend
        - * Delete entry
        - # Set start/end time
      - 4 Announce previous setting
      - 5 Repeat greeting
      - 6 Announce next setting
      - 1 Activate setting
      - 2 Deactivate setting
      - 3 Edit setting
        - 1 For voicemails
        - 2 For fax messages
        - 3 For e-mails
        - 4 For important voicemails
        - 5 For important fax messages
        - 6 For important e-mails
        - 7 For all messages
        - 8 For all important messages
        - # Exit
      - * Delete notification
      - # Cancel
    - 9 Check notification
    - # Cancel
  - 5 Playback options
    - 1 Xpressions folder
      - 1 In
      - 2 Off
      - # Cancel
    - 7 Automatic playback
      - 1 In
      - 2 Off
      - # Cancel
    - 3 Playback sequence
      - 1 New ones first
      - 2 Old ones first
      - # Cancel
    - 5 Volume
      - 5 Increase
      - 8 Decrease
      - # Cancel
  - 6 Enable or disable fax tone recognition
    - 4 Activate
    - 6 Deactivate
  - 7 Change menu language → Enter language code
  - 8 Set message type
    - 1 Message types
      - 1 Voicemails
      - 2 Fax messages
      - 3 E-mails
      - # Confirm
      - * Cancel
    - 2 New or new and old messages only
    - # Exit
  - # Cancel
    - 7 Delete phone number
    - 8 Delete notification time
    - 9 Delete message type
    - # Cancel
- 6 Access the voice portal of the OpenScape UC Application
  - 1 Set presence status
  - 2 Set preferred device
  - 6 Access calendar
  - 9 Change rules
  - # Cancel

Copyright © Unify Software and Solutions GmbH & Co. KG 11/2013
Mies-van-der-Rohe-Str. 6, 80807 Munich/Germany
All rights reserved.
Reference No.: A31003-S2370-U126-2-7619
The information provided in this document contains merely general descriptions or characteristics of performance which in case of actual use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract. Availability and technical specifications are subject to change without notice.
Unify, OpenScape, OpenStage and HiPath are registered trademarks of Unify Software and Solutions GmbH & Co. KG. All other company, brand, product and service names are trademarks or registered trademarks of their respective holders.
unify.com

OpenScape Xpressions V7 PhoneMail
Function Tree Octel-like-Menu
Brief function overview of the Enhanced Mode for greeting recording (Page 2 of 2)