



A MITEL
PRODUCT
GUIDE

Unify OpenScape 4000

SIU and DTR Tones

SIU and DTR Tones

Service Documentation
01/2023

Notices

The information contained in this document is believed to be accurate in all respects but is not warranted by Mitel Europe Limited. The information is subject to change without notice and should not be construed in any way as a commitment by Mitel or any of its affiliates or subsidiaries. Mitel and its affiliates and subsidiaries assume no responsibility for any errors or omissions in this document. Revisions of this document or new editions of it may be issued to incorporate such changes. No part of this document can be reproduced or transmitted in any form or by any means - electronic or mechanical - for any purpose without written permission from Mitel Networks Corporation.

Trademarks

The trademarks, service marks, logos, and graphics (collectively “Trademarks”) appearing on Mitel’s Internet sites or in its publications are registered and unregistered trademarks of Mitel Networks Corporation (MNC) or its subsidiaries (collectively “Mitel”), Unify Software and Solutions GmbH & Co. KG or its affiliates (collectively “Unify”) or others. Use of the Trademarks is prohibited without the express consent from Mitel and/or Unify. Please contact our legal department at iplegal@mitel.com for additional information. For a list of the worldwide Mitel and Unify registered trademarks, please refer to the website: <http://www.mitel.com/trademarks>.

© Copyright 2024, Mitel Networks Corporation

All rights reserved

Contents

1 Introduction	5
1.1 Status	5
1.2 General	5
1.3 Country codes	5
1.3.1 Tone and Receiver Initializations	6
1.3.2 CP-Tone-Tables	10
2 SIU Functions	25
2.1 Conference	25
2.2 RTO Test	25
2.3 Filter Selection for Dial Tone Receivers	25
2.4 Evaluation Processes for Dial Tone Receivers	26
3 Receiver Variants	29
4 Announcements	31
5 Other Functions	35
5.1 Music-on-hold	35
5.2 Test Transmitter / Test Receiver	35
5.3 DTMF Receivers	35
5.4 DTMF Transmit Level Table	36
5.5 DTMF Level Country Table	36
6 References	39
7 Country Tables	41
7.1 Australia	41
7.2 Belgium	43
7.3 Brazil	45
7.4 Federal Republic of Germany	47
7.5 China	49
7.6 Czech Republic	51
7.7 Denmark	53
7.8 Finland	55
7.9 France	57
7.10 Great Britain	59
7.11 Greece	61
7.12 Commonwealth of Independant States (CIS)	63
7.13 Hong Kong	65
7.14 Indonesia	67
7.15 India	69
7.16 Israel	71
7.17 Italy	73
7.18 Japan	75
7.19 Cameroon	77
7.20 Corea	79
7.21 Malaysia	81
7.22 Morocco	83
7.23 Mexico	85
7.24 Netherlands	87

Contents

7.25 Austria	89
7.26 Oman	91
7.27 Pakistan	93
7.28 Philippines	95
7.29 Poland	97
7.30 Portugal	99
7.31 Republic of South Africa	101
7.32 Singapore	103
7.33 Spain	105
7.34 Sweden	107
7.35 Switzerland	109
7.36 Thailand	111
7.37 Turkey	113
7.38 Hungary	115
7.39 USA	117
7.40 Vietnam	119
7.41 Yugoslavia	121
7.42 Taiwan	122
Index	125

1 Introduction

1.1 Status

This specification is intended to supplement the HW or LW specification for SIU Type 1. It supplements the latter in respect of the new and additional requirements of Hicom 300 variant V3.1 or higher. The specification likewise applies to new SPX-based SIU or SIUCO implementations such as the SCC for Hicom 80 CM.

In the event of further country adaptations or other requirements, the specification will be amended accordingly.

1.2 General

At startup, the SIU's tone generators are supplied with the relevant parameters for timeslot, frequencies, level, and cadencing. These parameters are selected on a country-specific basis via the country code LKZ = selection of the appropriate file for loading the parameters. The country code is set by AMO.

The following tables contain all the tones generated by the SIU. Tones generated by software switching, such as non-circulating tone sequences, are not listed in these tables (e.g.: FRG negat. acknowledgment tone = 3.5 s busy tone).

At startup, the SIU's dial tone receivers are supplied with the relevant parameters for filter selection, evaluation mode. These parameters are selected on a country-specific basis via the country code LKZ = selection of the appropriate file for loading the parameters. The country code is set by AMO.

The language of the brief announcements is selected using the language code SKZ.

The following tables contain data which is loaded into the SIU.

1.3 Country codes

The AMO-ZAND commands of the tone and receiver initializations listed below apply to Hicom 300 V3.3+ and must be applied to the subsequent versions as appropriate.

1.3.1 Tone and Receiver Initializations

Country	LAW	AMO ZAND											
		TONES			SIU Tones							GAIN LOAD	
		TONTBL			Tones							DMPF LOAD	
		CP		SIU	SIUC	DTR				SIU NN	CONF C	GAIN CD	
		CPTON		SIU TON	SIU	HZE				SIU SPKZ	CONF HW	DMPF LKZ	
		RTO TON1	RTO TON2	LKZ	LKZ	LKZ	Mode (4,5)	Type (4,5)	Mode (6,7)	Type (6,7)		LKZ	
ALB													
ALG	A	2	13	T	T	T	1	1	9	1	3	T	0
ARG	A	2	1	0	0	0	1	1	1	2	4	0	0
AUS	A	2	2	4*	4*	4*	8	1	8	1	2	4	4
BAH	A	2	2	7	7	7	7	1	7	1	2	7	7
BEL	A	2	13	3*	3*	3*	1	1	3	3	1,2,3,6,B	3	3
BEN													
BGD	A	2	1	0	0	0	1	1	1	2	2	0	0
BLZ													
BOL	A	2	2	Q	Q	Q	B	1	B	1	4	Q	Q
BRA	A	2	2	Q*	Q*	Q*	B	1	B	1	9	Q	Q
BRD	A	2	1	0*	0*	0*	1	1	1	2	1	0	0
BUL	A	2	1	0	0	0	1	1	1	2	1	0	0
CHL	A	2	3	3	3	9	1	1	7	1	4	3	0
CHN	A	1	1	C*	C*	C*	4	1	4	1	2,C	C	C
COR	A	2	1	0	0	1	4	1	4	2	4	0	0
CRE	A	1	--	J*	J*	J*	4	1	4	2	1,G	J	J
DAN	A	2	2	H*	H*	0	1	1	1	2	2,7	H	H
ECU	A	2	13	3	3	3	1	1	3	3	4	3	0
EGY	A	2	2	7	7	7	7	1	7	1	2	0	0
ELF	A	2	13	A	A	A	7	1	A	1	3	A	0
EST	A	2	1	8	8	8	6	1	6	2	2,T	8	8
ETH													
FIN	A	2	1	8*	8*	8*	6	1	6	2	2,8	8	8
FRA	A	2	13	A*	A*	A*	7	1	A	1	3	A	A
GBR	A	2	2	7*	7*	7*	7	1	7	1	2	7	7
GEO (CIS)	A	1	1	13	13	13	C	1	C	1	2,H	1	13

Country	L A W	AMO ZAND											
		TONES			SIU Tones								GAIN LOAD
		TONTBL			Tones								DMPF LOAD
		CP		SIU	SIUC	DTR					SIUA NN	CONF C	GAINCD
		CPTON		SIU TON	SIU	HZE					SIU SPKZ	CONFHW	DMPF LKZ
	RTO TON1	RTO TON2	LKZ	LKZ	LKZ	Mode (4,5)	Type (4,5)	Mode (6,7)	Type (6,7)		LKZ		
GHA	A	1	1	B	B	C	4	1	4	1	2	B	0
GRI	A	2	1	R*	R*	J	4	1	4	2	N	0	R
GUA	A	2	1	R	R	1	4	1	4	2	4	0	0
CIS	A	2	5	13*	13*	13*	4	1	4	2	2,H	1	13
HGK	A	10	10	S*	S*	S*	7	1	7	1	2,C	S	S
HON	A	2	2	3	3	C	4	1	4	1	4	3	0
IDS	A	2	2	N*	N*	C	4	1	4	1	2,M	N	N
IND	A	8	8	7	7	11*	5	1	5	1	2	7	0
IRL	A	2	1	0	0	0	1	1	1	2	2	0	0
IRN	A	2	1	0	0	0	1	1	1	2	2	0	0
IRQ													
ISL													
ISR	A	2	2	15*	15*	15*	5	1	5	1	2	15	7
ITL	A	3	5	D*	D*	D*	1	1	6	1	A	D	D
JEM	A	2	2	7	7	7	7	1	7	1	2	7	7
JOR	A	2	2	7	7	7	7	1	7	1	2	7	7
JPN	A	2	---	18*	18*	18*	5	1	5	1	D	18	0
KAM	A	1	5	14*	14*	14*	4	1	4	1	3	14	0
KAT	A	2	2	7	7	7	7	1	7	1	2	7	7
KEN	A	2	2	4	4	C	4	1	4	1	2	4	0
KOL	A	2	1	9	9	9	1	1	7	1	4	0	0
KOR	A	2	2	16*	16*	16*	2	1	2	1	2	16	16
KRO	A	2	1	R	R	J	4	1	4	2	R	B	0
KUW	A	2	13	3	3	3	1	1	3	3	2	3	0
LAN													
LBY	A	2	2	0	0	C	4	1	4	1	2	0	0
LET	A	2	1	8	8	8	6	1	6	1	2	8	13
LIB	A	2	13	3	3	3	1	1	3	3	2	3	0
LIT	A	2	1	8	8	8	6	1	6	1	2	8	13
LUX	A	2	1	0	0	0	1	1	1	2	3	(0)	L
MAL	A	2	1	E*	E*	C	4	1	4	1	2,M	E	E

Introduction

Country codes

Country	L A W	AMO ZAND											
		TONES			SIU Tones							GAIN LOAD	
		TONTBL			Tones							DMPF LOAD	
		CP		SIU	SIUC	DTR				SIUA NN	CONF C	GAINCD	
		CPTON		SIU TON	SIU	HZE				SIU SPKZ	CONFHW	DMPF LKZ	
		RTO TON1	RTO TON2	LKZ	LKZ	LKZ	Mode (4,5)	Type (4,5)	Mode (6,7)	Type (6,7)		LKZ	
MAR	A	2	13	T*	T*	T*	1	1	9	1	3	T	T
MAZ	A	2	1	R	R	J	4	1	4	2	R	B	0
MEX	A	1	1	G*	G*	9	1	1	7	1	4	G	J
MTA													
MYA	A	2	---	Q	Q	0	1	1	1	2	2	Q	Q
NDL	A	2	1	B*	B*	B*	6	1	1	1	6	B	B
NIA	A	2	13	3	3	3	1	1	3	3	2,3	3	0
NIC	A	2	2	0	0	C	4	1	4	1	4	0	0
NOR	A	2	1	8	8	8	6	1	6	1	2,P	8	(8)
NSL													
OES	A	2	1	1*	1*	1*	4	1	4	2	1	1	1
OMA	A	2	2	12*	12*	C	4	1	4	1	2	12	0
PAK	A	2	1	0	0	1	4	1	4	2	2	0	0
PAN	A	2	2	0	0	C	4	1	4	1	4	0	0
PAR	A	2	2	0	0	C	4	1	4	1	4	0	0
PHI	A	2	---	P*	P*	C	4	1	4	1	2	P	P
POL	A	1	1	F*	F*	B	6	1	1	1	F	F	F
POR	A	2	1	9*	9*	9*	1	1	7	1	5	9	9
PRU	A	2	2	3	3	9	1	1	7	1	4	3	0
RSA	A	1	1	6*	6*	6*	5	1	5	1	2	6	6
RUM	A	2	1	0	0	0	1	1	1	2	1	0	13
RUS (CIS)	A	1	1	13*	13*	13*	C	1	C	1	2,H	1	13
SAL	A	2	2	0	0	C	4	1	4	1	4	0	0
SAR	A	2	13	3	3	3	1	1	3	3	2	3	0
SEN	A	2	---	T	T	T	1	1	9	1	3	T	0
SIM	A	2	2	3	3	C	4	1	4	1	2	3	0
SIN	A	2	---	M*	M*	0	1	1	1	2	2,C	M	M
SLO	A	2	1	R	R	J	4	1	4	2	2,U	B	0
SPA	A	2	13	5*	5*	5*	8	1	9	1	4	5	5
SRE	A	1	---	J*	J*	J*	4	1	4	2	1,O	J	J

Country	L A W	AMO ZAND											
		TONES			SIU Tones							GAIN LOAD	
		TONTBL			Tones							DMPF LOAD	
		CP		SIU	SIUC	DTR				SIUA NN	CONF C	GAINCD	
		CPTON		SIU TON	SIU	HZE				SIU SPKZ	CONFHW	DMPF LKZ	
		RTO TON1	RTO TON2	LKZ	LKZ	LKZ	Mode (4,5)	Type (4,5)	Mode (6,7)	Type (6,7)		LKZ	
SUD	A	8	3	7	7	1	4	1	4	2	2	7	7
SWD	A	2	2	U*	U*	2	4	1	4	1	2,S	U	U
SWZ	A	1	1	2*	2*	2*	4	1	4	1	1	2	2
SYR	A	2	13	3	3	3	1	1	3	3	2	3	0
TAN	A	2	2	3	3	C	4	1	4	1	2	B	0
THA	A	15	15	O*	O*	6	5	1	5	1	2,J	O	O
TRK	A	1	1	17*	17*	17*	4	1	4	1	V		0
TUN	A	2	13	T	T	T	1	1	9	1	3	T	0
UAE	A	2	2	7	7	7	7	1	7	1	2	7	0
UKR (CIS)	A	1	5	13	13	13	4	1	4	2	2,H	1	13
UNG	A	2	2	10*	10*	10*	1	1	1	1	E	1,10	(0)
URU	A	2	1	0	0	0	1	1	1	2	4	0	0
USA	μ	10	10	K*	K*	K*	2	1	2	1	2	K	(K)
VEN	A	2	1	N	N	9	1	1	7	1	2,4	N	0
VIT	A	2	2	0	0	C	4	1	4	1	2	0	C
WEI (CIS)	A	1	1	13	13	13	4	1	4	2	2,H	1	13
ZAI													

The timeslots specified in the tone tables apply to Highway 14 (0EH) or Highway 30 for EC systems (tsl converted to 2 MHz). The switching network input is used as the reference point for the level values (dBm0).

RTO1 is used for testing the 1st and 2nd HZE (dial tone receiver), as well as for loop tests on analog trunks.

RTO2 is used for testing the 3rd and 4th HZE if they are of a different type from the 1st and 2nd HZE.

RTO2 is also used in some cases to test busy tone detection.

Country codes marked * are original countries for which the tone plan was created. The other LKZ codes are countries which share existing tone plans.

NOTE: NB: Please do not confuse the 0 (zero) with the O (Oscar)!

1.3.2 CP-Tone-Tables

CP-Tone 0 - 8

CPTONE	Country	BRD 0	OES 1	SWZ 2	BEL 3	AUS 4	SPA 5	RSA 6	GBR 7	FIN 8
KEINTON / NOTONE		00	00	00	00	00	00	00	00	00
WTONINT / INTDTN		01	01	01	01	01	01	01	01	01
WTONEXT / EXTDTN		02	02	01	02	02	02	02	02	02
SONDWTN / SPEC		03	03	03	03	03	03	03	03	03
FREITON / RNGBK		04	04	04	04	04	04	04	04	04
EFREITON / FRNGBK		02	02	01	02	13	02	02	04	02
BTON / BUSY		05	05	05	05	05	05	05	05	05
AFSTON / OVRTN		06	06	06	06	06	06	06	06	06
ANKLTON / CAMP		07	07	07	07	07	07	07	22	06
DRUFTON / DATA		09	09	09	02	09	09	09	01	09
BITTEWAR / HOLDLINE		16	16	16	16	16	16	16	16	16
NICHTERR / NOTREACH		17	17	17	17	17	17	17	17	17
NIMO / NOPO		18	18	18	18	18	18	18	18	18
NIBER / NOTALWD		19	19	19	19	19	19	19	19	19
ZZTNIMO / IMPOSSFM		20	20	20	20	20	20	20	20	20
MUSIC / MOH		22	22	22	22	22	22	22	22	22
QTONNEG / NACK		05*	05	05	05	05	05	05	14	05
QTONPOS / PACK		02**	02	01	10	02	02	02	10	02
VOICEMAL / VOICEMAL		00	00	00	00	00	00	00	00	00
TESTTON / TESTTONE		25	25	25	25	25	25	25	25	25
NACHRILV / MWI		21	21	21	21	21	21	21	21	21
GASSBES / CONG		05	05	05	11	05	05	11	11	05
NUTON / NUTONE		08	08	08	08	08	08	08	08	08
\$QUEUES		00	00	00	00	00	00	00	00	00
\$QUEUEL		00	00	00	00	00	00	00	00	00

Table 1

CPTONE	Country	BRD 0	OES 1	SWZ 2	BEL 3	AUS 4	SPA 5	RSA 6	GBR 7	FIN 8
ROUTEADV		02	02	01	02	02	02	02	02	02
LCRET / LCRET		26	26	26	26	26	26	26	26	26
RECALL		01	01	01	01	01	01	01	01	01
\$OVRBUSY		00	00	00	00	00	00	00	00	00
\$OVRINJ		00	00	00	00	00	00	00	00	00
SPECRING		04	04	04	04	04	04	04	04	04
\$CALLWAIT		00	00	00	00	00	00	00	00	00
\$CAMPINV		00	00	00	00	00	00	00	00	00
\$CAMPREC		00	00	00	00	00	00	00	00	00
\$LDNCALL		00	00	00	00	00	00	00	00	00
\$OPERATOR		00	00	00	00	00	00	00	00	00
\$NOANS		00	00	00	00	00	00	00	00	00
\$HOLDREC		00	00	00	00	00	00	00	00	00
KONFTON / CONFTN		06	06	06	06	06	06	06	24	06
PRUEFTON / TEST		00	00	01	00	00	00	01	00	00
WTONEXT2 / EXTDTN2		02	02	01	13	13	13	02	02	02
BTLNAUFG / BONHK		05	05	05	05	05	05	05	05	05
WAHLVERZ / NODIAL		05	05	05	05	05	05	05	05	05
WARTTON / HOLD		00	00	00	00	00	00	00	00	00
AUFMERK / ALERT		07	07	07	07	07	07	07	06	06
RUECKANK / CBKALERT		04	04	04	04	04	04	04	04	04
AFSAUTO / OVR		06	06	06	06	06	06	06	06	06
AFSVORW / OVRWARN		00	00	00	00	00	00	00	24	00
RTOTON / RTOTONE		02	02	01	02	02	02	01	02	02
AUFVERZ / REORDER		05	05	05	05	05	05	05	11	05
ORTANS / LOCANN		00	00	00	00	00	00	00	00	00
ATONKONF / KNCONF		07	07	07	07	07	07	07	24	24
ARSTON / DND		04	04	04	04	04	04	04	05	04
QTONPMW / PCKWD		02	02	01	10	02	02	02	03	02
ZIPTONE / ZIPTONE		02	02	01	02	02	02	01	08	02
\$PHONEMAIL MW TONE		00	00	00	00	00	00	00	00	00
AWVPL / ANNICPT		16	16	16	16	16	16	16	16	16
\$TONART_NULL		00	00	00	00	00	00	00	00	00
RTOTON1 / RTOTON1		02	02	01	02	02	02	01	02	02
RTOTON2 / RTOTON2		01	01	01	13	02	13	01	02	01

Table 1

Introduction

Country codes

CPTONE	Country	BRD 0	OES 1	SWZ 2	BEL 3	AUS 4	SPA 5	RSA 6	GBR 7	FIN 8
EANKLTON / FCAMP		07	07	07	07	07	07	07	08	06
TRENNTON / DISCTONE		08	08	08	08	08	08	08	08	08
MAUFTON / CMALSTONE		02	02	01	02	02	02	01	02	02
WARTEXT / HOLDEXT		16	16	16	16	16	16	16	16	16
WARTINT / HOLDINT		22	22	22	22	22	22	22	22	22
WARTSA / HOLDUNT		04	04	04	04	04	04	04	04	04
WARTPSE / HOLDCCS		04	04	04	04	04	04	04	04	04
WARTH1 / HOLDH1		16	16	16	16	16	16	16	16	16
WARTH2 / HOLDH2		22	22	22	22	22	22	22	22	22
\$TDS TEST SILENCE		00	00	00	00	00	00	00	00	00
\$TDS TEST 1004HZ		00	00	00	00	00	00	00	00	00
SAAO / HUNTGRUP		04	04	04	04	04	04	04	04	04
NAWA / POSTDIAL		01	01	01	01	01	01	01	01	01
PSMABSEN/ CCMABSEN		05	05	05	05	05	05	05	05	05
\$BUSY WITH DIAL TONE		00	00	00	00	00	00	00	00	00
\$DEVICE LOCAL TONE		00	00	00	00	00	00	00	00	00
\$IDLE CODE		00	00	00	00	00	00	00	00	00
HEULTON / HOWLTONE		00	00	00	00	00	00	00	00	00
\$DTMF_TON		00	00	00	00	00	00	00	00	00
\$DTMF_SUPPRESSION		00	00	00	00	00	00	00	00	00
ROUTINGTON		00	00	00	00	00	00	00	00	00
PROVIDER_WARTETON		00	00	00	00	00	00	00	00	00
OFF_HOOK_RECALL		00	00	00	00	00	00	00	00	00
REQUEST_DIAL_TONE		00	00	00	00	00	00	00	00	00
PAUSED_DIAL_TONE		02	02	01	02	02	02	02	02	02
RESERVE_85										

Table 1

* Tone is switched off by CP Software after 3.5 seconds

** Ton wird durch die CP Software nach 3.5 Sekunden abgeschalte

(\$) Not used today

CP-Tone 9 and A - H

CPTONE	Country	POR 9	FKR A	NDL B	CHN C	ITL D	MAL E	POL F	MEX G	DAN H
KEINTON / NOTONE		00	00	00	00	00	00	00	00	00
WTONINT / INTDTN		01	01	01	01	01	01	01	01	01
WTONEXT / EXTDTN		02	02	02	01	02	02	01	01	02
SONDWTN / SPEC		03	03	03	03	03	03	03	03	03
FREITON / RNGBK		04	04	04	04	04	04	04	04	04
EFREITON / FRNGBK		02	02	01	15	03	01	01	01	02
BTON / BUSY		05	05	05	05	05	05	05	05	05
AFSTON / OVRTN		06	06	06	06	06	06	06	06	06
ANKLTON / CAMP		07	07	07	07	07	22	07	07	07
DRUFTON / DATA		09	02	09	01	03	09	01	09	01
BITTEWAR / HOLDLINE		16	16	16	16	16	16	16	16	16
NICHTERR / NOTREACH		17	17	17	17	17	17	17	17	17
NIMO / NOPO		18	18	18	18	18	18	18	18	18
NIBER / NOTALWD		19	19	19	19	19	19	19	19	19
ZZTNIMO / IMPOSSFM		20	20	20	20	20	20	20	20	20
MUSIC / MOH		22	22	22	22	22	22	22	22	22
QTONNEG / NACK		05	05	05	05	23	14	05	05	05
QTONPOS / PACK		02	02	01	01	10	10	01	01	01
VOICEMAL / VOICEMAL		00	00	00	00	00	00	00	00	00
TESTTON / TESTTONE		25	25	25	25	25	25	25	25	25
NACHRILV / MWI		21	21	21	21	21	21	21	21	21
GASSBES / CONG		05	05	11	11	11	11	05	05	05
NUTON / NUTONE		08	05	08	08	23	08	08	08	05
\$QUEUES		00	00	00	00	00	00	00	00	00
\$QUEUEL		00	00	00	00	00	00	00	00	00
ROUTEADV		02	02	02	01	02	02	01	01	02
LCRET / LCRET		26	26	26	26	26	26	26	26	26
RECALL		01	01	01	01	01	01	01	01	01
\$OVRBUSY		00	00	00	00	00	00	00	00	00
\$OVRINJ		00	00	00	00	00	00	00	00	00
SPECRING		04	04	04	04	04	04	04	04	04
\$CALLWAIT		00	00	00	00	00	00	00	00	00
\$CAMPINV		00	00	00	00	00	00	00	00	00

Table 2

Introduction

Country codes

CPTONE	Country	POR 9	FKR A	NDL B	CHN C	ITL D	MAL E	POL F	MEX G	DAN H
\$CAMPREC		00	00	00	00	00	00	00	00	00
\$LDNCALL		00	00	00	00	00	00	00	00	00
\$OPERATOR		00	00	00	00	00	00	00	00	00
\$NOANS		00	00	00	00	00	00	00	00	00
\$HOLDREC		00	00	00	00	00	00	00	00	00
KONFTON / CONFTN		06	06	06	12	12	08	00	06	06
PRUEFTON / TEST		00	15	00	00	00	00	00	00	00
WTONEXT2 / EXTDTN2		02	13	02	00	02	02	13	02	02
BTLNAUFG / BONHK		05	05	05	05	23	05	05	05	05
WAHLVERZ / NODIAL		05	05	05	05	23	05	05	05	05
WARTTON / HOLD		00	00	00	00	00	00	00	00	00
AUFMERK / ALERT		07	07	07	07	07	06	07	07	07
RUECKANK / CBKALERT		04	04	04	04	04	04	04	04	04
AFSAUTO / OVR		06	06	06	06	06	06	06	06	06
AFSVORW / OVRWARN		00	00	00	00	00	24	00	00	00
RTOTON / RTOTONE		02	02	02	01	01	02	01	02	02
AUFVERZ / REORDER		05	05	05	05	23	11	05	05	05
ORTANS / LOCANN		00	00	00	00	00	00	00	00	00
ATONKONF / KNCONF		07	07	07	07	07	24	00	07	07
ARSTON / DND		04	04	04	04	04	05	04	04	04
QTONPMW / PCKWD		02	02	01	01	10	10	01	01	02
ZIPTONE / ZIPTONE		02	02	01	01	03	02	01	01	02
\$PHONEMAIL MW TONE		00	00	00	00	00	00	00	00	00
AWVPL / ANNICPT		16	16	16	16	16	16	16	16	16
\$TONART_NULL		00	00	00	00	00	00	00	00	00
RTOTON1 / RTOTON1		02	02	02	01	01	02	01	01	00
RTOTON2 / RTOTON2		02	13	01	01	03	01	01	01	00
EANKLTON / FCAMP		07	02	07	07	07	07	07	07	07
TRENNTON / DISCTONE		08	05	08	08	05	08	08	08	08
MAUFTON / CMALSTONE		02	01	02	01	01	02	02	02	02
WARTEXT / HOLDEXT		16	16	16	16	16	16	16	16	16
WARTINT / HOLDINT		22	22	22	22	22	22	22	22	22
WARTSA / HOLDUNT		04	04	04	04	04	04	04	04	04
WARTPSE / HOLDCCS		04	04	04	04	04	04	04	04	04
WARTH1 / HOLDH1		16	16	16	16	16	16	16	16	16

Table 2

Country CPTONE	POR 9	FKR A	NDL B	CHN C	ITL D	MAL E	POL F	MEX G	DAN H
WARTH2 / HOLDH2	22	22	22	22	22	22	22	22	22
\$TDS TEST SILENCE	00	00	00	00	00	00	00	00	00
\$TDS TEST 1004HZ	00	00	00	00	00	00	00	00	00
SAAO / HUNTGRUP	04	04	04	04	04	04	04	04	04
NAWA / POSTDIAL	01	01	01	01	01	01	01	01	01
PSMABSEN/ CCMABSEN	05	05	05	05	05	05	05	05	05
\$BUSY WITH DIAL TONE	00	00	00	00	00	00	00	00	00
\$DEVICE LOCAL TONE	00	00	00	00	00	00	00	00	00
\$IDLE CODE	00	00	00	00	00	00	00	00	00
HEULTON /HOWLTONE	00	00	00	00	00	00	00	00	00
\$DTMF_TON	00	00	00	00	00	00	00	00	00
\$DTMF_SUPPRESSION	00	00	00	00	00	00	00	00	00
ROUTINGTON	00	23	00	00	00	00	00	00	00
PROVIDER_WARTETON	00	00	00	00	00	00	00	00	00
OFF_HOOK_RECALL	00	00	00	00	00	00	00	00	00
REQUEST_DIAL_TONE	00	00	00	00	00	00	00	00	00
PAUSED_DIAL_TONE	02	02	02	01	02	02	01	01	02
RESERVE_85									

Table 2

CP-Tone I - Q

Country CPTONE	ARG I	CRE J	USA K	LUX L	SIN M	IDS N	THA O	PHI P	BRA Q
KEINTON / NOTONE	00	00	00	00	00	00	00	00	00
WTONTN / INTDTN	00	01	01	00	01	01	01	01	01
WTONEXT / EXTDTN	00	02	01	00	02	02	02	02	02
SONDWTON / SPEC	00	03	03	00	03	03	03	03	03
FREITON / RNGBK	00	04	08	00	04	04	04	04	04
EFREITON / FRNGBK	00	01	08	00	15	02	15	03	02
BTON / BUSY	00	05	05	00	05	05	05	05	05
AFSTON / OVRTN	00	06	10	00	06	06	06	06	06
ANKLTON / CAMP	00	07	13	00	06	06	06	06	07
DRUFTON / DATA	00	01	04	00	01	01	01	01	09
BITTEWAR / HOLDLINE	00	16	00	00	16	16	16	16	16

Table 3

Introduction

Country codes

CPTONE	Country	ARG I	CRE J	USA K	LUX L	SIN M	IDS N	THA O	PHI P	BRA Q
NICHTERR / NOTREACH		00	17	09	00	17	17	17	17	17
NIMO / NOPO		00	18	09	00	18	18	18	18	18
NIBER / NOTALWD		00	19	14	00	19	19	19	19	19
ZZTNIMO / IMPOSSFM		00	20	09	00	20	20	20	20	20
MUSIC / MOH		00	22	00	00	22	22	22	22	22
QTONNEG / NACK		00	05	09	00	05	14	05	14	05
QTONPOS / PACK		00	01	01	00	01	10	01	10	02
VOICEMAL / VOICEMAL		00	00	00	00	00	00	00	00	00
TESTTON / TESTTONE		00	25	25	00	25	25	25	25	25
NACHRILV / MWI		00	21	01	00	21	21	21	21	21
GASSBES / CONG		00	11	05	00	11	11	11	11	05
NUTON / NUTONE		00	08	09	00	08	08	08	08	08
\$QUEUES		00	00	07	00	00	00	00	00	00
\$QUEUEL		00	00	07	00	00	00	00	00	00
ROUTEADV		00	02	01	00	02	02	02	02	02
LCRET / LCRET		00	26	10	00	26	26	26	26	26
RECALL		00	01	01	00	01	01	01	01	01
\$OVRBUSY		00	00	10	00	00	00	00	00	00
\$OVRINJ		00	00	12	00	00	00	00	00	00
SPECRING		00	04	13	00	04	04	04	040	04
\$CALLWAIT		00	00	10	00	00	00	00	00	00
\$CAMPINV		00	00	09	00	00	00	00	00	00
\$CAMPREC		00	00	10	00	00	00	00	00	00
\$LDNCALL		00	00	02	00	00	00	00	00	00
\$OPERATOR		00	00	10	00	00	00	00	00	00
\$NOANS		00	00	00	00	00	00	00	00	00
\$HOLDREC		00	00	10	00	00	00	00	00	00
KONFTON / CONFTN		00	06	10	00	06	06	06	06	06
PRUEFTON / TEST		00	00	15	00	00	00	00	00	00
WTONEXT2 / EXTDN2		00	02	01	00	02	02	02	02	02
BTLNAUFG / BONHK		00	05	05	00	05	05	05	05	05
WAHLVERZ / NODIAL		00	05	05	00	05	05	05	05	05
WARTTON / HOLD		00	00	00	00	00	00	00	00	00
AUFMERK / ALERT		00	07	00	00	06	06	06	06	07
RUECKANK / CBKALERT		00	04	00	00	04	04	04	04	04

Table 3

Country CPTONE	ARG I	CRE J	USA K	LUX L	SIN M	IDS N	THA O	PHI P	BRA Q
AFSAUTO / OVR	00	06	00	00	06	06	06	06	06
AFSVORW / OVRWARN	00	00	00	00	00	00	00	00	00
RTOTON / RTOTONE	00	02	00	00	02	02	02	02	02
AUFVERZ / REORDER	00	05	05	00	05	05	05	05	05
ORTANS / LOCANN	00	00	00	00	00	00	00	00	00
ATONKONF / KNCONF	00	07	00	00	06	06	06	06	07
ARSTON / DND	00	04	08	00	04	04	04	04	04
QTONPMW / PCKWD	00	01	01	00	01	10	01	10	02
ZIPTONE / ZIPTONE	02	01	02	03	02	01	01	02	02
\$PHONEMAIL MW TONE	00	00	11	00	00	00	00	00	00
AWVPL / ANNICPT	00	16	00	00	16	16	16	16	16
\$TONART_NULL	00	00	00	00	00	00	00	00	00
RTOTON1 / RTOTON1	00	00	10	00	02	02	02	02	02
RTOTON2 / RTOTON2	00	13	05	00	01	01	01	01	02
EANKLTON / FCAMP	00	07	07	00	07	07	07	02	07
TRENTON / DISCTONE	00	08	09	00	08	08	08	08	08
MAUFTON / CMALTONE	00	01	01	00	02	02	02	02	02
WARTEXT / HOLDEXT	00	16	00	00	16	16	16	16	16
WARTINT / HOLDINT	00	22	00	00	22	22	22	22	22
WARTSA / HOLDUNT	00	04	08	00	04	04	04	04	04
WARTPSE / HOLDCCS	00	04	00	00	04	04	04	04	04
WARTH1 / HOLDH1	00	16	00	00	16	16	16	16	16
WARTH2 / HOLDH2	00	22	00	00	22	22	22	22	22
\$TDS TEST SILENCE	00	00	00	00	00	00	00	00	00
\$TDS TEST 1004HZ	00	00	15	00	00	00	00	00	00
SAAO / HUNTGRUP	00	04	01	00	04	04	04	04	04
NAWA / POSTDIAL	00	01	01	00	01	01	01	01	01
PSMABSEN/ CCMABSEN	00	05	00	00	05	05	05	05	05
\$BUSY WITH DIAL TONE	00	00	05	00	00	00	00	00	00
\$DEVICE LOCAL TONE	00	00	00	00	00	00	00	00	00
\$IDLE CODE	00	00	00	00	00	00	00	00	00
HEULTON /HOWLTONE	00	00	00	00	00	00	00	00	00
\$DTMFON	00	00	00	00	00	00	00	00	00
\$DTMF_SUPPRESSION	00	00	00	00	00	00	00	00	00
ROUTINGTON	00	00	00	00	00	00	00	00	00

Table 3

Introduction

Country codes

Country CPTONE	ARG I	CRE J	USA K	LUX L	SIN M	IDS N	THA O	PHI P	BRA Q
PROVIDER_WARTETON	00	00	00	00	00	00	00	00	00
OFF_HOOK_RECALL	00	00	00	00	00	00	00	00	00
REQUEST_DIAL_TONE	00	00	01	00	00	00	00	00	00
PAUSED_DIAL_TONE	01	01	01	01	01	01	01	01	01
RESERVE_85									

Table 3

CP-Tone R - W and 10, 12 - 15

Country CPTONE	GRI R	HKG S	MAR T	SWD U	A-Law V	U-Law W	UNG 10	OMA 12	GUS 13	KAM 14	ISR 15
KEINTON / NOTONE	00	00	00	00	00	00	00	00	00	00	00
WTONINT / INTDTN	01	01	01	02	01	01	02	01	01	01	01
WTONEXT / EXTDTN	02	02	01	02	01	01	02	02	01	02	02
SONDWTON / SPEC	03	03	03	03	03	03	03	03	03	03	01
FREITON / RNGBK	04	04	04	04	08	08	04	04	04	04	04
EFREITON / FRNGBK	02	15	02	02	08	08	02	00	01	01	02
BTON / BUSY	05	05	05	05	05	05	05	05	05	05	05
AFSTON / OVRTN	06	06	06	06	10	10	06	06	06	06	06
ANKLTON / CAMP	07	07	07	06	13	13	07	06	07	07	06
DRUFTON / DATA	09	00	00	00	04	04	00	01	01	09	01
BITTEWAR / HOLDLINE	16	16	06	16	16	16	16	16	16	16	16
NICHTERR / NOTREACH	17	17	16	17	05	05	17	17	17	17	17
NIMO / NOPO	18	18	17	18	05	05	18	18	18	18	18
NIBER / NOTALWD	19	19	18	19	14	14	19	19	19	19	19
ZZTNIMO / IMPOSSFM	20	20	19	20	05	05	20	20	20	20	20
MUSIC / MOH	22	22	22	22	22	22	22	22	22	22	22
QTONNEG / NACK	05	05	05	05	14	14	05	05	05	05	05
QTONPOS / PACK	02	10	10	02	01	01	02	01	01	01	10
VOICEMAL / VOICEMAL	00	00	20	00	00	00	00	00	00	00	00
TESTTON / TESTTONE	25	25	25	25	25	25	25	25	25	13	15
NACHRILV / MWI	21	21	00	21	21	21	21	13	21	21	21
GASSBES / CONG	05	11	05	05	05	05	05	11	11	11	11
NUTON / NUTONE	08	08	08	08	05	05	08	08	08	08	08
\$QUEUES	00	00	00	00	00	00	00	00	00	00	00

Table 4

CPTONE	Country	GRI R	HKG S	MAR T	SWD U	A-Law V	U-Law W	UNG 10	OMA 12	GUS 13	KAM 14	ISR 15
\$QUEUEL		00	00	00	00	00	00	00	00	00	00	00
ROUTEADV		02	02	01	02	01	01	02	02	01	02	02
LCRET / LCRET		26	26	07	00	00	00	00	26	26	26	26
RECALL		01	01	01	02	01	01	02	01	01	01	01
\$OVRBUSY		00	00	00	00	10	10	00	00	00	00	00
\$OVRINJ		00	00	00	00	12	12	00	00	00	00	00
SPECRING		04	04	04	04	13	13	04	04	04	04	04
\$CALLWAIT		00	00	00	00	10	10	00	00	00	00	00
\$CAMPINV		00	00	00	00	00	00	00	00	00	00	00
\$CAMPREC		00	00	00	00	10	10	10	00	00	00	00
\$LDNCALL		00	00	00	00	01	01	00	00	00	00	00
\$OPERATOR		00	00	00	00	10	10	00	00	00	00	00
\$NOANS		00	00	00	00	00	00	00	00	00	00	00
\$HOLDREC		00	00	00	00	10	10	00	00	00	00	00
KONFTON / CONFTN		06	06	06	06	10	10	07	06	06	06	06
PRUEFTON / TEST		00	00	15	02	15	15	15	00	01	00	15
WTONEXT2 / EXTDTN2		02	02	13	02	01	01	02	02	01	02	02
BTLNAUFG / BONHK		05	05	05	05	05	05	05	05	05	05	05
WAHLVERZ / NODIAL		05	05	05	05	05	05	05	05	05	05	05
WARTTON / HOLD		00	00	00	00	00	00	00	00	09	00	00
AUFMERK / ALERT		07	07	00	06	10	10	07	06	06	07	06
RUECKANK / CBKALERT		04	04	06	04	04	04	04	04	01	04	04
AFSAUTO / OVR		06	06	04	06	06	06	06	06	06	06	06
AFSVORW / OVRWARN		00	00	06	00	00	00	00	00	00	00	00
RTOTON / RTOTONE		02	02	02	02	15	15	15	01	01	01	02
AUFVERZ / REORDER		05	05	02	05	09	09	05	05	00	05	05
ORTANS / LOCANN		00	00	21	00	00	00	00	00	00	00	00
ATONKONF / KNCONF		07	07	05	06	06	06	07	06	06	07	06
ARSTON / DND		04	04	07	04	08	08	04	04	01	04	04
QTONPMW / PCKWD		02	10	04	04	01	01	02	01	01	04	01
ZIPTONE / ZIPTONE		03	01	02	02	01	01	02	02	01	01	02
\$PHONEMAIL MW TONE		00	00	00	00	11	11	00	00	00	00	00
AWVPL / ANNICPT		16	16	00	16	16	16	16	00	00	00	00
\$TONART_NULL		00	00	00	00	00	00	00	00	00	00	00
RTOTON1 / RTOTON1		02	02	00	02	10	10	00	02	01	01	02

Table 4

Introduction

Country codes

CPTONE	Country	GRI R	HKG S	MAR T	SWD U	A-Law V	U-Law W	UNG 10	OMA 12	GUS 13	KAM 14	ISR 15
RTOTON2 / RTOTON2		01	01	13	02	01	01	00	02	05	05	15
EANKLTON / FCAMP		07	07	22	07	10	10	07	06	06	07	06
TRENNTON / DISCTONE		08	07	01	08	09	09	08	06	08	08	08
MAUFTON / CMALSTONE		02	01	08	02	01	01	06	08	01	06	02
WARTEXT / HOLDEXT		16	16	16	16	16	16	11	11	16	16	16
WARTINT / HOLDINT		22	22	16	22	22	22	22	22	22	22	22
WARTSA / HOLDUNT		04	04	22	04	08	08	04	04	04	04	04
WARTPSE / HOLDCCS		04	04	04	04	04	04	04	04	04	04	04
WARTH1 / HOLDH1		16	16	04	16	04	04	16	16	16	16	16
WARTH2 / HOLDH2		22	22	16	22	22	22	22	22	22	22	22
\$TDS TEST SILENCE		00	00	00	00	00	00	00	00	00	00	00
\$TDS TEST 1004HZ		00	00	00	00	15	15	00	00	00	00	00
SAAO / HUNTGRUP		04	04	04	04	01	01	04	04	04	04	04
NAWA / POSTDIAL		01	01	01	02	01	01	02	02	01	02	01
PSMABSEN/ CCMABSEN		05	05	05	05	05	05	05	05	05	05	05
\$BUSY WITH DIAL TONE		00	00	00	00	05	05	00	00	00	00	00
\$DEVICE LOCAL TONE		00	00	00	00	00	00	00	00	00	00	00
\$IDLE CODE		00	00	00	00	00	00	00	00	00	00	00
HEULTON / HOWLTONE		00	00	00	00	00	00	00	00	09	00	00
\$DTMFON		00	00	00	00	00	00	00	00	00	00	00
\$DTMF_SUPPRESSION		00	00	00	00	00	00	00	00	00	00	00
ROUTINGTON		00	00	00	00	00	00	00	00	00	00	00
PROVIDER_WARTETON		00	00	00	00	00	00	00	00	00	00	00
OFF_HOOK_RECALL		00	00	00	00	00	00	00	00	00	00	00
REQUEST_DIAL_TONE		00	00	00	00	01	01	00	00	00	00	00
PAUSED_DIAL_TONE		02	02	01	02	01	01	02	02	01	02	02
RESERVE_85						23	23					

Table 4

CP-Tone 16 - 19, 29 and 30

CPTONE	Country	KOR 16	TRK 17	JPN 18	VIT 19	YUG 29	TWN 30
KEINTON / NOTONE		00	00	00	00	00	00
WTONINT / INTDTN		01	01	01	01	01	01

Table 5

CPTONE	Country	KOR 16	TRK 17	JPN 18	VIT 19	YUG 29	TWN 30
WTONEXT / EXTDTN		02	02	02	01	02	02
SONDWTON / SPEC		01	03	03	03	09	03
FREITON / RNGBK		04	04	04	04	04	04
EFREITON / FRNGBK		15	02	03	01	01	02
BTON / BUSY		05	05	05	05	05	05
AFSTON /OVRTN		06	06	06	06	06	06
ANKLTON / CAMP		07	07	07	07	07	07
DRUFTON / DATA		01	01	09	01	01	09
BITTEWAR / HOLDLINE		16	16	16	16	16	16
NICHTERR / NOTREACH		17	17	17	17	17	17
NIMO / NOPO		18	18	18	18	18	18
NIBER / NOTALWD		19	19	19	19	19	19
ZZTNIMO / IMPOSSFM		20	20	20	20	20	20
MUSIC / MOH		22	22	22	22	22	22
QTONNEG / NACK		05	05	05	05	05	05
QTONPOS / PACK		01	01	01	01	10	02
VOICEMAL / VOICEMAL		00	00	00	00	00	00
TESTTON / TESTTONE		23	23	00	25	25	00
NACHRILV / MWI		21	21	21	21	21	21
GASSBES / CONG		11	11	05	11	11	05
NUTON / NUTONE		05	08	08	08	08	08
\$QUEUES		00	00	00	00	00	00
\$QUEUEL		00	00	00	00	00	00
\$ROUTEADV		02	02	02	01	02	02
LCRET / LCRET		26	26	26	26	26	26
RECALL		01	01	01	01	01	01
\$OVRBUSY		00	00	00	00	00	00
\$OVRINJ		00	00	00	00	00	00
SPECRING		04	04	04	04	04	00
\$CALLWAIT		00	00	00	00	00	00
\$CAMPINV		00	00	00	00	00	00
\$CAMPREC		00	00	00	00	00	00
\$LDNCALL		00	00	00	00	00	00
\$OPERATOR		00	00	00	00	00	00
\$NOANS		00	00	00	00	00	00

Table 5

Introduction

Country codes

CPTONE	Country	KOR 16	TRK 17	JPN 18	VIT 19	YUG 29	TWN 30
\$HOLDREC		00	00	00	00	00	00
KONFTON / CONFTN		06	06	06	06	06	06
PRUEFTON / TEST		23	23	00	00	01	00
WTONEXT2 / EXTDTN2		02	02	02	01	02	02
BTLNAUFG / BONHK		05	05	05	05	05	05
WAHLVERZ / NODIAL		05	05	05	05	05	05
WARTTON / HOLD		00	09	00	00	09	00
AUFMERK / ALERT		06	06	07	07	07	07
RUECKANK / CBKALERT		04	04	04	04	04	04
AFSAUTO / OVR		06	06	06	06	06	06
AFSVORW / OVRWARN		00	00	00	00	00	00
RTOTON / RTOTONE		02	01	02	01	01	00
AUFVERZ / REORDER		05	05	05	05	05	05
ORTANS / LOCANN		00	00	00	00	00	00
ATONKONF / KNCONF		07	07	7	07	07	07
ARSTON / DND		04	04	04	04	04	04
QTONPMW / PCKWD		01	01	01	01	04	02
ZIPTONE / ZIPTONE		02	01	02	01	01	02
\$PHONEMAIL MW TONE		00	00	00	00	00	00
AWVPL / ANNICPT		00	00	16	16	00	16
\$TONART_NULL		00	00	00	00	00	00
RTOTON1 / RTOTON1		02	02	02	01	02	02
RTOTON2 / RTOTON2		02	02	01	24	01	01
EANKLTON / FCAMP		07	07	07	07	07	07
TRENNTON / DISCTONE		05	08	08	06	08	08
MAUFTON / CMALSTONE		02	02	02	01	06	02
WARTEXT / HOLDEXT		16	16	16	16	16	16
WARTINT / HOLDINT		22	22	22	22	22	22
WARTSA / HOLDUNT		04	04	04	04	04	04
WARTPSE / HOLDCCS		04	04	04	04	04	04
WARTH1 / HOLDH1		16	16	16	16	16	16
WARTH2 / HOLDH2		22	22	22	22	22	22
\$TDS TEST SILENCE		00	00	00	00	00	00
\$TDS TEST 1004HZ		00	00	00	00	00	00
SAAO / HUNTGRUP		04	04	04	04	04	04

Table 5

CPTONE	Country	KOR 16	TRK 17	JPN 18	VIT 19	YUG 29	TWN 30
NAWA / POSTDIAL		01	01	01	01	01	01
PSMABSEN/ CCMABSEN		05	05	05	05	05	05
\$BUSY WITH DIAL TONE		00	00	00	00	00	00
\$DEVICE LOCAL TONE		00	00	00	00	00	00
\$IDLE CODE		00	00	00	00	00	00
HEULTON / HOWLTONE		00	09	00	00	09	00
\$DTMF_TON		00	00	00	00	00	00
\$DTMF_SUPPRESSION		00	00	00	00	00	00
ROUTINGTON		00	00	00	00	00	00
PROVIDER_WARTETON		00	00	00	00	00	00
OFF_HOOK_RECALL		00	00	00	00	00	00
REQUEST_DIAL_TONE		00	00	00	00	00	00
PAUSED_DIAL_TONE		02	02	02	01	02	00
RESERVE_85							

Table 5

2 SIU Functions

2.1 Conference

The conference tables show which tones are consecutively injected for which times in conference, camp-on or override connections.

For injection into calls via the conference, several tones are generated in parallel in the SIU sometimes for the same application, in order to be able to serve the systems using a separate conference unit (e.g. compact systems).

At system startup, care must be taken to ensure that the required timeslots are also switched to a separate conference module by means of "nailed connections".

2.2 RTO Test

In order to ensure a reliable response of the HZE for RTO testing, such as echo testing on circuits, a suitable tone is required on a country-specific basis depending on the HZE. This need not necessarily be the "ext. dial tone", as this simulated CO dial tone (AWT) only has to create the same audible impression as the genuine dial tone sent by the exchange. There may be physical differences between AWT and simulated AWT which prevent the HZE from responding when the simulated AWT is applied.

Example: Republic of South Africa

CO dial tone (AWT):	400 Hz ampl.-modulated with 33 Hz
Simulated AWT:	400 Hz beating with 33 Hz

The tone suitable for RTO testing, which can be used in conjunction with the country-specific HZE, is identified with 1 or 2 in the RTO column in the tables.

2.3 Filter Selection for Dial Tone Receivers

Selection of the filter suitable for each country is set during initialization (mode setting).

The values set are listed in the country-specific receiver table.


2.4 Evaluation Processes for Dial Tone Receivers

The "HZE-MODE" table in Sect. 8 contains a list of the setting options incl. frequency, level, and application.


The required evaluation process is selected via the TYPE setting. The evaluation program is supplied with further parameters depending on the process.

The following evaluation processes are possible:

TYPE1: Differentiating between continuous tone and cadenced tone (e.g. B-tone)			
	Setting parameter:	minimum time for continuous tone	t1
		minimum pulse for B-tone	t2
		maximum pulse for B-tone	t3
		minimum pause for B-tone	t4
		maximum pause for B-tone	t5

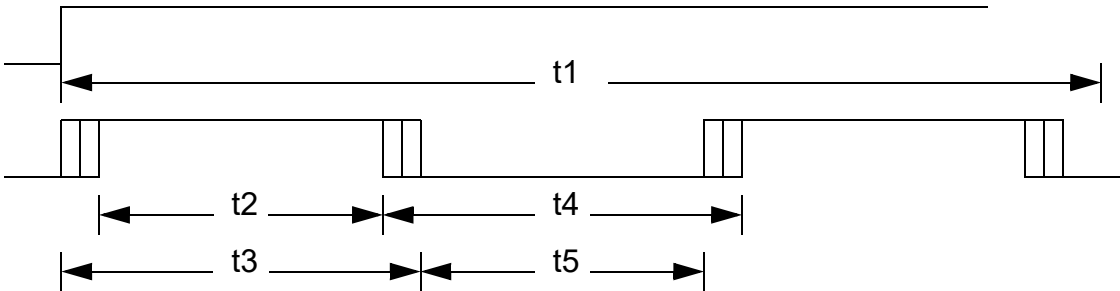


TYPE2: Differentiating between cadenced dial tone (IWT) and cadenced tone (e.g. B-tone)			
	Setting parameter:	min. long pause for IWT	t1
		max. time to negat. edge	t2

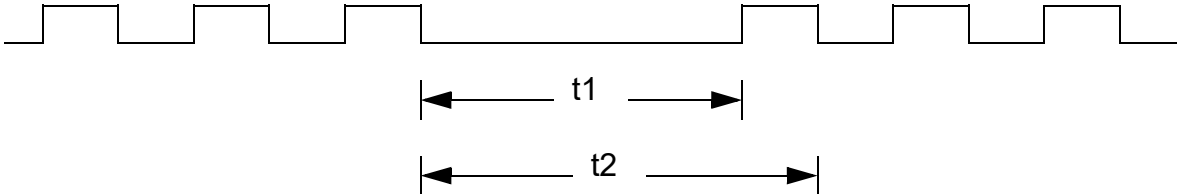

TYPE3: Evaluating the 2nd AWT in Belgium (precise pulse/pause measurement)			
	Setting parameter:	max. pulse + max. pause	t1
		minimum pulse	t2

		minimum pause	t3
		max. pulse - min. pulse	t4
		max. pause - min. pause	t5
		disconnect time	t6

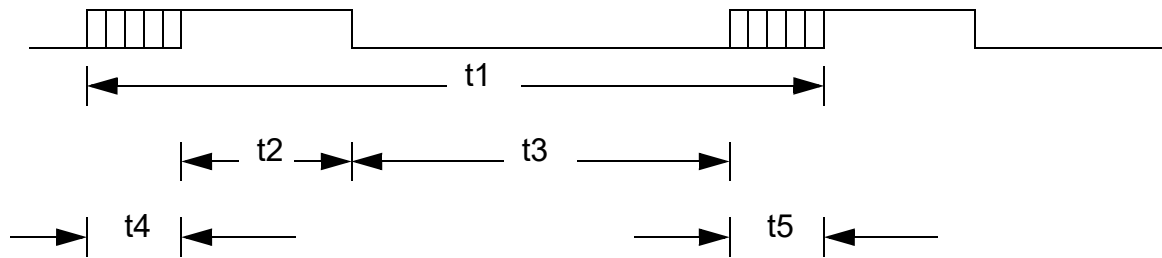

SIU Functions

Evaluation Processes for Dial Tone Receivers

3 Receiver Variants

MODE	Frequency range (Hz)	Threshold (dBm0)	Nominal value	Country of use
1	371 - 485	-20.9	425 Hz	AWT (CO dial tone) FRG
				1st AWT Belgium
				AWT Australia
				AWT Finland
				1st AWT Italy
2	320 - 660	- 20.9	350 Hz + 440 Hz	AWT USA
3	1118 - 1156	- 20.4	1140 Hz	2nd AWT Belgium
4	364 - 554	- 20.9	440 Hz	AWT Switzerland
				AWT Austria
				AWT China
				AWT "GDR"
5	366 - 427	- 34.4	400 Hz mod 33 Hz	AWT South Africa
6	76 - 607	- 23.4	450 Hz + 150 Hz	AWT Netherlands
				2nd AWT Italy
7	420 - 467	- 32.9	440 Hz (+ 330 Hz)	AWT UK
				2nd AWT Portugal
				AWT France
8	280 - 506	- 38.3	425 Hz	1st AWT Spain
				1st AWT Portugal
9	560 - 635	- 38.3	600 Hz	2nd AWT Spain
A	281 - 370	-32.5	330 Hz	2nd AWT France
B	335 - 484	-20.9	425 Hz	2nd AWT BRA
C	387 - 463	-28.0	425 Hz (+500) Hz	CIS (ANI-proof)

Tone to be evaluated: $F = F1 (+ F2)$

Response for mode 1...6, 8, 9, B, D: F1 and F2 in filter range

Response for mode 7, A, C : F1 in filter range (F2 can be outside)

Examples:

2nd AWT France = 440 + 330 Hz, must be differentiated from 1st AWT France = 440 Hz.

Here the 330 Hz component must be detected.

Receiver Variants

AWT UK is 440 + 330 Hz.

The 440 Hz component must be detected, 330 Hz is irrelevant.

Although in the CIS countries a 500-Hz ANI signal tone may additionally be present, this must not prevent reception

For mode 1...6, 8, 9, B reception is rejected if an additional tone is discovered in the out-band range (voice protection).

Mode = 2 can also be used for A-law from SIUX onwards (SIUCX, SICOE). For SIU type 1 and SIUCO, only for u-law (special US-SIU).

4 Announcements

For certain features, brief announcements can be played to the user. Six announcement texts have been specified for this purpose. These announcement texts are stored in different languages. The required language is selected via the language code (SPKZ).

SPKZ	Language	SPKZ	Language
0	Language-neutral	N	Greek
1	German	O	Slovakian
2	English (British)	P	Norwegian
3	French	Q	Catalonian
4	Spanish	R	(reserved)
5	Portuguese	S	Swedish
6	Dutch	T	Estonian
7	Danish	U	Slovenian
8	Finnish	V	Turkish
9	Brazilian	W	Croat
A	Italian	X	
B	Flemish	Y	
C	Chinese	Z	
D	English (USA)		
E	Hungarian		
F	Polish		
G	Czech		
H	Russian (GUS)		
I	Indonesian		
J	Thai		
K	Argentinian		
L	Rumanian		
M	Malayan		

Wording of announcements

- German

Tsl	German	Lang. code= 1
16	Bitte warten	
17	Teilnehmer ist nicht erreichbar	
18	Funktion ist nicht möglich	

Announcements

Tsl	German	Lang. code= 1
19	Sie sind nicht berechtigt	
20	Zur Zeit nicht möglich	
21	Nachricht liegt vor	

- English

Tsl	English	Lang. code = 2
16	Please hold the line	
17	Number not available	
18	Function not possible	
19	Access not authorized	
20	Currently in use	
21	You have a message	

- French

Tsl	French	Lang. code = 3
16	Un instant, s.v.p.	
17	Correspondant inaccessible	
18	Fonction impossible	
19	Non autorisé	
20	Bloqué pour l'instant	
21	Message en attente	

- Spanish

Tsl	Spanish	Lang. code = 4
16	Espere po favor	
17	No accesible	
18	Función imposible	
19	No autorizado	
20	Bloquado de momento	
21	Mensaje en espera	

- Portuguese

Tsl	Portuguese	Lang. code = 5
16	Espere, faz favor	
17	Assinante nao éacessivel	
18	A funcao nao épossivel	
19	Nao estautorizado	
20	Atualmente bloqueado	
21	Mensagem disponivel	

- Dutch

Tsl	Dutch	Lang. code = 6
16	Een ogenblik alstublieft	
17	Abonnee niet gereikbaar	
18	Functie niet mogelijk	
19	U bent hiertoe niet bevoegd	
20	Momenteel geblokkeerd	
21	Een bericht voor u	

- Danish

Tsl	Danish	Lang. code = 7
16	Et ojeblik	
17	Abonnent kan ikke kaldes	
18	Funktion ikke huldig	
19	Service ikke tilladt	
20	For tiden spaerret	
21	Meddelse foreligger	

- Finnish

Tsl	Finnish	Lang. code = 8
16	Odottakaa	
17	Tilaajaa ei saavuteta	

Announcements

Tsl	Finnish	Lang. code = 8
18	Toiminta mahdoton	
19	Teillä ei ole oikeutta	
20	Tällä hetkellä estetty	
21	Saapunut sanoma	

- Italian

Tsl	Italian	Lang. code = A
16	Un momemto	
17	Utente irraggiungibile	
18	Funzione impossibile	
19	Lei non é abilitato	
20	Attualmente bloccato	
21	Messaggio nel mail-box	

5 Other Functions

5.1 Music-on-hold

Users held in a queue can be also supplied with music-on-hold instead with the "Please hold the line" announcement. Three melodies + "Quiet" are available. "Quiet" consists of pauses only, for customers who want neither the announcement nor music-on-hold. The selection is made via the music code.

TSL	Music-on-hold
22	Hicom melody (replaced by "Quiet")
22	Schäffler Dance
22	A Little Night Music
22	Quiet (pauses only)

5.2 Test Transmitter / Test Receiver

TSL	Music-on-hold
25	Test transmitter (pattern generator)
02	Test receiver (pattern receiver)

5.3 DTMF Receivers

The 4 DTMF receivers of the SIU are permanently switched to the following timeslots when the module is initialized. Highway A and highway B are the 2-MHz highways leading to the SIU. When using 4-MHz highways (SIUCO), these are understood as the two highways converted to 2 MHz.

TSL	Hwy	Function
00	A	DTMF receiver 0
01	A	DTMF receiver 1
00	B	DTMF receiver 2
01	B	DTMF receiver 3
03	A	DTMF receiver 4
04	A	DTMF receiver 5

Other Functions

DTMF Transmit Level Table

TSL	Hwy	Function
02	B	DTMF receiver 6
03	B	DTMF receiver 7

DTMF receivers 4,5,6,7 are only present in the SICOE of HICOM300 V3.5 or higher

5.4 DTMF Transmit Level Table

DTMF transmit table (SIU 2)					
LKZ	Filename	Country	Aggregate level in dBm0	Lower freq. lim. level in dBm0	Upper freq. lim. level in dBm0
0	PZJS1ES0	Standard	+0.80	-7.20	-5.20
(4)	PZJS1ES(4)	(Australia)	(-1.20)	(-9.20)	(-7.20)
5	PZJS1ES5	Spain/Belgium	+2.08	-5.92	-3.92
7	PZJS1ES7	United Kingdom	-5.20	-13.20	-11.20
B	PZJS1ESB	Netherlands	-3.00	-11.00	-9.00

NOTE: DTMF levels for Australia (4) have not been implemented.

5.5 DTMF Level Country Table

In the SIUCO, the level for its DTMF generators is set for each country code (LKZ) as follows:

LKZ	Aggregate level	LKZ	Aggregate level
0	+0.8 dBm0	Q	+0.8 dBm0
1	+0.8	R	
2	+0.8	S	+0.8
3	+0.8	T	+0.8
4	-3.0	U	+0.8
5	+2.08	V	
6	-3.0	W	+0.8
7	-5.2	X	
8	+0.8	Y	
9	+0.8	Z	

LKZ	Aggregate level	LKZ	Aggregate level
A	+0.8	10	+0.8
B	-3.0	11	
C	+0.8	12	+2.08
D	+0.8	13	+2.08
E	+0.8	14	+0.8
F	+0.8	15	+0.8
G	+0.8	16	+0.8
H	+0.8	17	+0.8
I		18	+0.8 ?
J	+0.8		19
K	+0.8		20
L			21
M	+0.8		22
N	+0.8		23
O	+0.8		24
P	+0.8		25

6 References

The table below gives the documents used for compiling the tone tables and receiver tables for the newly added countries from V3.1 onwards. PTT regulations of the countries from V2.1 and V2.2 are not listed here.

Further information concerning the operation of the tone generators and dial tone receivers may be obtained from the hardware and loadware specification for the SIU.

China:	TECHNICAL SPECIFICATION OF SPC DIGITAL PRIVATE EXCHANGES TO BE INTRODUCED January, 1987
France:	System Specification A20 SPECIFICATION TECHNIQUE ST/PAA/TPA/STP/1284 Spécification des tonalités et annonces parlées émises par un autocommutateur privé. SPECIFICATION TECHNIQUE ST/PAA/TPA/AGH/1108 June 1985 - 3eme EDITION Interface réseau analogique des matériels téléphoniques et télématiques
UK:	Audible Tones required in UK (A30 paper) BS 6450 Part 1 BS 6450 Part 2 BS 6305
Holland:	System Specification A30 Technical requirements for terminals for connection to the public telephone network, ... T 11-03
Italy:	System Specification A30 ISPT Chap.7, Chap 11
Poland:	Technical Requirements Digital Switching Systems IL - 94 - CF Date: 01-02-1991 Partial copy of Hr. Pfrommer (pages 42 - 44)
South Africa:	STANDARD SPECIFICATION FOR PRIVATE AUTOMATIC BRANCH EXCHANGES June 1988 Specification 3P26/PABX/JUNE 1988

References

7 Country Tables

7.1 Australia

Tone Table						
					SIUX SIUCO	V3.3+ V3.3+
Date: 22/10/1996			Australia: LKZ = 4			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	-	0			
1	Int. Dial	8	400 + 450		Continuous	-11
2	Ext. Dial 1	6	425	x	Continuous	-11
3	Special Dial	5	425		<u>200/300/200/300/200/800</u>	-11
4	Ring	10	400 + 450		<u>400/200/400/2000</u>	-11
5	Busy	0	425		<u>380</u> / 380	-11
6	Override	1	425		<u>800</u> / 15000	-11
7	Camp On	2	425		<u>200</u> / 200 / <u>200</u> / 4400	-11
8	Number Unobtainable	11	425		<u>2500</u> / 500	-11
9	Data Call	3	1300		<u>600</u> / 1740	-11
10	Pos. Acknowledge	-				
11	Congestion	-				
12	Conference	-				
13	Ext. Dial 2	9	400 + 425		Continuous	-11
14	Neg. Acknowledge	-				
15	-	-				
23	Alarm	-				
24	Conference Aux.	4	425		Continuous	-11
25	-	-				
26	LCR Tone	12	1800		<u>340/200/340/200/340/1000</u>	-11

Conference Tones							
						SIUCO	V3.3+
Date: 12/05/1995			Australia: LKZ = 4				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
800	Conf.Aux	Cont.	Camp On	Cont.	Camp On	800	Conf. Aux.

Country Tables

Australia

Conference Tones							
						SIUCO	V3.3+
Date: 12/05/1995			Australia: LKZ = 4				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
Cont.	Quiet	-	-	-	-	500	Quiet
-	-	-	-	-	-	Cont.	Override
-	-	-	-	-	-	-	-

Dial Tone Receiver (DTR)			
			SIUCO V3.3+
Date: 12/05/1995		Australia: LKZ = 4	
		1st DTR und 2nd DTR	3rd DTR und 4th DTR
Mode (filter selection)		8	8
Type (time evaluation)		1	1
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	600 ms	600 ms
Pulse min.	(T2)	280 ms	280 ms
Pulse max.	(T3)	480 ms	480 ms
Pause min.	(T4)	280 ms	280 ms
Pause max.	(T5)	480 ms	480 ms
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		
Pulse max. + pause max.	(T2)		
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.2 Belgium

Tone Table						
					SIU SIUCO	V3.1 V3.2
Date: 18/06/1989			Belgium: LKZ = 3			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	-	0			
1	Int. Dial	6	425		<u>2000</u> /300	1
2	Ext. Dial	0	425	1	Continuous	1
3	Special Dial	10	425 + 400		Continuous	-0,8
4	Ring	1	425		<u>1000</u> /3000	-1
5	Busy	2	425		<u>500</u> /500	-1
6	Override	3	425		<u>200</u> /3500	-8
7	Camp On	4	425		<u>100</u> /1900	-8
8	Number Unobtainable	11	950/1400/1800		<u>320</u> /320/320/1000	-8
9	Data Call					
10	Pos. Acknowledge	9	425		<u>40</u> /40	1
11	Congestion	8	425		<u>240</u> /260	-1
12	Conference	-				
13	Ext. Dial 2	7	900/1000/1140	2	<u>380</u> /380/380	1
14	Neg. Acknowledge	-				
15	-	-				
23	Conference Aux. 2	-				
24	Conference Aux.	5	425		Continuous	-8
25		-				
26		-				

Conference Tones							
					SIUCO SCC	V3.2 V3.3	
Date: 30/03/1993			Belgium: LKZ = 3				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
200	Conf. Aux.	Cont.	Camp On	Cont.	Camp On	Cont.	Override
3500	Pause	-	-	-	-	-	-
200	Conf. Aux.	-	-	-	-	-	-
Cont.	Quiet	-	-	-	-	-	-

Dial Tone Receiver (DTR)			
		SIUCO	V3.3+
Date: 13/09/1990	Belgium: LKZ = 3		
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		1	3
Type (time evaluation)		1	3
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	650 ms	
Pulse min.	(T2)	200 ms	
Pulse max.	(T3)	550 ms	
Pause min.	(T4)	200 ms	
Pause max.	(T5)	550 ms	
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		
Pulse max. + pause max.	(T2)		
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		1220 ms
Pulse min.	(T2)		205 ms
Pause min.	(T3)		445 ms
Pulse max. - pulse min.	(T4)		215 ms
Pause max. - pause min.	(T5)		390 ms
Disconnect time	(T6)		30 ms

7.3 Brazil

Tone Table						
					SIUCO SIUX	V3.2 V3.3+
Date: 27.10.1999			Brazil: LKZ = Q			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	7	0			
1	Int. Dial	0	425		<u>920</u> /80	-10
2	Ext. Dial	1	425	1,2	Continuous	-10
3	Special Dial	8	425 + 400		Continuous	-10
4	Ring	2	425		<u>1000</u> /4000	-10
5	Busy	3	425		<u>240</u> /260	-10
6	Override	4	425		<u>60</u> /1800	-19
7	Camp On	5	425		<u>200</u> /300/ <u>200</u> /1300	-19
8	Number Unobtainable	11	950/1400/1800		<u>320</u> / <u>320</u> / <u>320</u> /960	-3
9	Data Call	6	1300		<u>600</u> /1800	-3
10	Follow-me	13	425		<u>120</u> /120	-10
11	Inaccessible network	14	425		<u>500</u> /500	-10
12	Conference	-				
13	Ext. Dial 2	-				
14	Neg. Acknowledge	10	425		<u>100</u> /100	-10
15	-	-				
23	-	-				
24	Conference Aux.	9	425		Continuous	-19
25	-	-				
26	LCR Tone	12	1800		<u>340</u> /200/ <u>340</u> /200/ <u>340</u> /1000	

Conference Tones							
						SIUCO SCC SIUX	V3.2 V3.3 V3.3+
Date: 18/05/1994			Brazil: LKZ = Q				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
200	Conf. Aux.	Cont.	Camp On	Cont.	Camp On	60	Conf. Aux.
300	Pause	-	-	-	-	100	Pause
200	Conf. Aux.	-	-	-	-	Cont.	Override

Conference Tones							
						SIUCO SCC SIUX	V3.2 V3.3 V3.3+
Date: 18/05/1994			Brazil: LKZ = Q				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
Cont.	Quiet	-	-	-	-	-	-

Dial Tone Receiver (DTR)			
		SIUCO	V3.3+
Date: 18/05/1994		Brazil: LKZ = Q	
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		B	B
Type (time evaluation)		1	1
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	500 ms	500 ms
Pulse min.	(T2)	180 ms	180 ms
Pulse max.	(T3)	320 ms	320 ms
Pause min.	(T4)	180 ms	180 ms
Pause max.	(T5)	320 ms	320 ms
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		
Pulse max. + pause max.	(T2)		
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.4 Federal Republic of Germany

Tone Table						
						SIU SIUCO V3.1 V3.2
Date: 24/06/1989		Federal Republic of Germany: LKZ = 0				
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	7	0			
1	Int. Dial	0	425	2	<u>200/300/200/300/200/800</u>	-3
2	Ext. Dial	1	425	1	Continuous	-3
3	Special Dial	8	425 + 400		Continuous	-3
4	Ring	2	425		<u>1000/4000</u>	-3
5	Busy	3	425		<u>160/440</u>	-3
6	Override	4	425		<u>200/300/200/1300</u>	-14
7	Camp On	5	425		<u>100/1900</u>	-14
8	Number Unobtainable	11	950/1400/1800		<u>320/320/320/960</u>	-3
9	Data Call	6	1300		<u>600/1800</u>	+1
10	Pos. Acknowledge	-				
11	NCN Dial	13	450		Dauer	-10
12	NCN Busy	14	450		<u>300/300</u>	-10
13	NCN Ring Back	15	450		<u>1000/2000</u>	-10
14	NCN Warning	7	450		<u>100/100/100/100/100/500</u>	-10
15	-	-				
23		-				
24	Conference Aux.	9	425		Continuous	-14
25	-	-				
26	LCR Tone		1800		<u>340/200/340/200/340/1000</u>	-3

Conference Tones							
						SIUCO SCC V3.2 V3.3	
Date: 30/03/1993		Federal Republic of Germany: LKZ = 0					
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
200	Conf. Aux.	Cont.	Camp On	Cont.	Camp On	Cont.	Override
300	Pause	-	-	-	-	-	-
200	Conf. Aux.	-	-	-	-	-	-
Cont.	Quiet	-	-	-	-	-	-

Dial Tone Receiver (DTR)			
		SIUCO	V3.3+
Date: 13/09/1990	Federal Republic of Germany: LKZ = 0		
		1st DTR and 2nd DTR	3rd and DTR 4th DTR
Mode (filter selection)		1	1
Type (time evaluation)		1	2
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	500 ms	
Pulse min.	(T2)	160 ms	
Pulse max.	(T3)	250 ms	
Pause min.	(T4)	250 ms	
Pause max.	(T5)	440 ms	
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		800 ms
Pulse max. + pause max.	(T2)		1000 ms
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.5 China

Tone Table						
						SIU SIUCO V3.1 V3.2
Date: 27/06/1989			China: LKZ = C			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	-	0			
1	Int. Dial	0	400	1,2	Continuous	-5
2	Ext. Dial	-				
3	Special Dial	6	400		<u>400</u> /40	-9
4	Ring	1	450		<u>1000</u> /4000	-9
5	Busy	2	450		<u>350</u> /350	-9
6	Override	3	450		<u>200</u> /200/ <u>200</u> /600	-19
7	Camp On	4	450		<u>400</u> /4000	-19
8	Number Unobtainable	8	450		<u>100</u> /100/ <u>100</u> /100/ <u>100</u> /100/ <u>400</u> /400	-9
9	Data Call	-				
10	Pos. Acknowledge	-				
11	Congestion	7	450		<u>700</u> /700	-9
12	Conference	9	1400		<u>400</u> /10000	-19
13	Ext. Dial 2	-				
14	Neg. Acknowledge	-				
15	Erstfreiton	5	450		Continuous	-9
23	Conference Aux. 2	11	1400		Continuous	-19
24	Conference Aux.	10	450		Continuous	-19
25	-	-				
26	LCR Tone	12	1800		<u>340</u> /200/ <u>340</u> /200/ <u>340</u> /1000	-5

Conference Tones							
						SIUCO SCC V3.2 V3.3	
Date: 30/03/1993			China: LKZ = C				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
Cont.	Conference	Cont.	Camp On	Cont.	Camp On	Cont.	Override
		-	-	-	-	-	-
		-	-	-	-	-	-

Conference Tones							
						SIUCO SCC	V3.2 V3.3
Date: 30/03/1993			China: LKZ = C				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
		-	-	-	-	-	-

Dial Tone Receiver (DTR)			
		SIUCO	V3.3+
Date: 13/09/1990		China: LKZ = C	
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		4	4
Type (time evaluation)		1	1
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	900 ms	900 ms
Pulse min.	(T2)	310 ms	310 ms
Pulse max.	(T3)	770 ms	770 ms
Pause min.	(T4)	310 ms	310 ms
Pause max.	(T5)	770 ms	770 ms
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		
Pulse max. + pause max.	(T2)		
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.6 Czech Republic

Tone Table						
						SIU SIUCO
						V3.1 V3.2
Date: 27/08/1993			Czech Republic: LKZ = J			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	-	0			
1	Int. Dial	0	425	1	Continuous	-5
2	Ext. Dial	1	425		<u>320/340/660/600</u>	-5
3	Special Dial	8	425		<u>160/160</u>	-5
4	Ring	2	425		<u>1000/4000</u>	-5
5	Busy	3	425		<u>320/340</u>	-5
6	Override	4	425		<u>320/340/320/1500</u>	-11
7	Camp On1	5	425		<u>320/5000</u>	-11
8	Number Unobtainable	11	950/1400/1800		<u>320/320/320/1000</u>	-5
9	Data Call	-				
10	Pos. Acknowledge	-				
11	Congestion	7	425		<u>120/120</u>	-5
12	Conference	-				
13	Ext. Dial 2 (simulated)	-				
14	Neg. Acknowledge	-				
15	Camp On 2	6	425		<u>1000/160/340/3500</u>	-5
23	Conference Aux. 2	-				
24	Conference Aux.	9	425		Continuous	-11
25	-	-				
26	LCR Tone		1800		<u>340/200/340/200/340/1000</u>	-5

Conference Tones							
						SIUCO SCC	V3.2 V3.3
Date: 30/03/1993			Czech Republic: LKZ = J				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
600	Int. Dial	Cont.	Camp On	Cont.	Camp On	Cont.	Override
Cont.	Quiet	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-

Dial Tone Receiver (DTR)			
		SIUCO	V3.3+
Date: 07/09/1993	Czech Republic: LKZ = J		
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		4	4
Type (time evaluation)		1	2
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	450 ms	
Pulse min.	(T2)	140 ms	
Pulse max.	(T3)	180 ms	
Pause min.	(T4)	420 ms	
Pause max.	(T5)	460 ms	
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		800 ms
Pulse max. + pause max.	(T2)		1000 ms
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.7 Denmark

Tone Table						
						SIU SIUCO
						V3.1 V3.2
Date: 15/09/1992			Denmark: LKZ = H			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	-	0			
1	Int. Dial	10	400 + 450		Continuous	-6,5
2	Ext. Dial	1	425	1,2	Continuous	-6,5
3	Special Dial	8	480 + 620		<u>20</u> /20	-6,5
4	Ring	2	425		<u>1000</u> /4000	-6,5
5	Busy	3	425		<u>240</u> /240	-6,5
6	Override	4	425		<u>20</u> /500	-6,5
7	Camp On	5	425		<u>200</u> /200/ <u>200</u> /3600	-12,5
8	Number Unobtainable	11	950/1400/1800		<u>320</u> / <u>320</u> / <u>320</u> /1000	-6,5
9	Data Call	-				
10	Pos. Acknowledge	6	425		<u>320</u> /20	-6,5
11	Congestion	7	425		<u>500</u> /500	-6,5
12	Conference	-				
13	Ext. Dial 2 (simulated)	-				
14	Neg. Acknowledge	-				
15	-	-				
23	Conference Aux. 2	-				
24	Conference Aux.	0	425		Continuous	-12,5
25	-	-				
26	LCR Tone		1800		<u>340</u> /200/ <u>340</u> /200/ <u>340</u> /1000	

Conference Tones							
						SIUCO SCC	V3.2 V3.3
Date: 27/08/1993			Denmark: LKZ = H				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
20	Ext. Dial	Cont.	Camp On	Cont.	Camp On	Cont.	Override
500	Pause	-	-	-	-	-	-
20	Ext. Dial	-	-	-	-	-	-
500	Pause						

Conference Tones							
						SIUCO SCC	V3.2 V3.3
Date: 27/08/1993			Denmark: LKZ = H				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
20	Ext. Dial						
Cont.	Quiet	-	-	-	-	-	-

Dial Tone Receiver (DTR)			
		SIUCO	V3.3+
Date: 13/09/1993		Denmark (Federal Republic of Germany): LKZ = 0	
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		1	1
Type (time evaluation)		1	2
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	500 ms	
Pulse min.	(T2)	160 ms	
Pulse max.	(T3)	250 ms	
Pause min.	(T4)	250 ms	
Pause max.	(T5)	440 ms	
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		800 ms
Pulse max. + pause max.	(T2)		1000 ms
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.8 Finland

Tone Table						
					SIU SIUCO	V3.1 V3.2
Date: 14/08/1995			Finland: LKZ = 8			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	-	0			
1	Int. Dial (Centrex access)	0	425	2	<u>200/300/200/300/200/800</u>	-8
2	Ext. Dial	1	425	1	Continuous	-8
3	Special Dial	8	425		<u>660/20</u>	-8
4	Ring back	2	425		<u>1000/4000</u>	-8
5	Busy	3	425	2	<u>300/300</u>	-8
6	Override	4	425		<u>200/300/200/1300</u>	-15
7	Camp On	-				
8	Number Unobtainable	11	950/1400/1800		<u>340/340/340/1000</u>	-15
9	Data Call	6	1300		<u>600/1800</u>	-8
10	Pos. Acknowledge	-				
11	Congestion	-				
12	Conference	-				
13	Ext. Dial 2	-				
14	Neg. Acknowledge	-				
15	-	-				
23	-	-				
24	Conference Aux.	5	425		Continuous	-15
25	-	-				
26	LCR Tone	12	1800		<u>340/200/340/200/340/1000</u>	-8

Conference Tones							
					SIUCO SCC	V3.2 V3.3	
Date: 02/08/1995			Finland: LKZ = 8				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
200	Conf. Aux.	-	-	-	-	Cont.	Override
300	Idle Channel	-	-	-	-	-	-
200	Conf. Aux.	-	-	-	-	-	-
5000	Idle Channel	-	-	-	-	-	-

Conference Tones							
						SIUCO SCC	V3.2 V3.3
Date: 02/08/1995			Finland: LKZ = 8				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
200	Conf. Aux.	-	-	-	-	-	-
300	Idle Channel	-	-	-	-	-	-
200	Conf. Aux.	-	-	-	-	-	-
Cont.	Idle Channel	-	-	-	-	-	-
-	-	-	-	-	-	-	-

Dial Tone Receiver (DTR)			
		SIU SIUCO	V3.1 V3.2
Date: 15/08/1995		Finland: LKZ = 8	
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		6	6
Type (time evaluation)		1	2
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	500	
Pulse min.	(T2)	220	
Pulse max.	(T3)	380	
Pause min.	(T4)	220	
Pause max.	(T5)	380	
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		800 ms
Pulse max. + pause max.	(T2)		1000 ms
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

NOTE: For the TYPE 2 times, pulse + pause max (T2) is now specified as 1000 ms because it was already coded in this way in the old version and adopted.

7.9 France

Tone Table						
						SIU SIUCO V3.1 V3.2
Date: 25/04/1989			France: LKZ = A			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	-	0			
1	Int. Dial	0	330		Continuous	-8
2	Ext. Dial	1	440	1	Continuous	-11
3	Special Dial	8	440/440 + 330		<u>750</u> /750	-8/-11
4	Ring	2	440		<u>1500</u> /3500	-11
5	Busy	3	440		<u>500</u> /500	-11
6	Override	4	440		<u>200</u> /320/ <u>200</u> /1400	-11
7	Camp On	5	440		<u>300</u> /30000	-11
8	Number Unobtainable	11	440/330/440		<u>350</u> / <u>350</u> / <u>350</u> /500	-11
9	Data Call	-				
10	Pos. Acknowledge	6	330		<u>50</u> /50	-8
11	Congestion	-				
12	Conference	-				
13	Ext. Dial 2 (simulated)	9	330 + 440	2	Continuous	-8/-11
14	Neg. Acknowledge	-				
15	Test	7/10	800		Continuous	-2
23	Vermittlungston ¹	13	440		<u>40</u> /60	-11
24	Conference Aux.	10/7	440		Continuous	-11
25	-	-				
26	LCR Tone	-	1800		<u>340</u> /200/ <u>340</u> /200/ <u>340</u> /1000	-11

1 Routing Tone = Tonalité d'achèvement for SNCF can only be implemented with SIUX, SIUCX

Conference Tones							
						SIUCO SCC V3.2 V3.3	
Date: 30/03/1993			France: LKZ = A				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
200	Conf. Aux.	300	Ext. Dial	300	Ext. Dial	Cont.	Override
300	Pause	1000	Pause	1000	Pause	-	-
200	Conf. Aux.	Cont.	Camp On	Cont.	Camp On	-	-

Conference Tones							
						SIUCO SCC	V3.2 V3.3
Date: 30/03/1993			France: LKZ = A				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
Cont.	Quiet	-	-	-	-	-	-

Dial Tone Receiver (DTR)			
		SIUCO	V3.3+
Date: 15/06/1991		France: LKZ = A	
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		7	A
Type (time evaluation)		1	1
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	1200 ms	1200 ms
Pulse min.	(T2)	380 ms	380 ms
Pulse max.	(T3)	560 ms	560 ms
Pause min.	(T4)	400 ms	400 ms
Pause max.	(T5)	590 ms	590 ms
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		
Pulse max. + pause max.	(T2)		
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.10 Great Britain

Tone Table						
						SIU SIUCO SIUX
						V3.1 V3.2 E V2.0
Date: 8.11.1999			Great Britain: LKZ = 7			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	7	0			
1	Int. Dial	8	400 + 450		Continuous	-6
2	Ext. Dial	9	350 + 440	1,2	Continuous	-6
3	Special Dial	11	440 + 480		<u>200/300/200/300/200/800</u>	-6
4	Ring	10	400 + 450		<u>400/200/400/2000</u>	-11
5	Busy	0	425		<u>380/380</u>	-14,5
6	Override	1	1400		<u>200/1500</u>	-10
7	Camp On	-				
8	Number Unobtainable	5	400		Cont.	-14,5
9	Data Call	-				
10	Pos. Acknowledge	2	520/400		<u>340/340/800</u>	-6
11	Congestion	4	425		<u>400/360/220/520</u>	-6
12	Conference	-				
13	Ext. Dial 2 (simulated)	-				
14	Neg. Acknowledge	6	400/520		<u>340/340/800</u>	-6
15	RTO1-Test-World Wide	13	423	1 *	Dauer	-10
23		-				
24	Conference Aux.	3	1400		Continuous	-10
25		-				
26	LCR Tone	12	1800		<u>340/200/340/200/340/1000</u>	-3

* The "RTO-Test World Wide" tone is used worldwide at the British embassies, which use the tone table in conjunction with the receiver table of the country concerned.

Conference Tones							
						SIUCO SCC	V3.2 V3.3
Date: 30/03/1993			Great Britain: LKZ = 7				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
2000	Conf. Aux.	100	Conf. Aux.	100	Conf. Aux.	Cont.	Override
Cont.	Quiet	10000	Pause	100	Pause	-	-

Conference Tones							
						SIUCO SCC	V3.2 V3.3
Date: 30/03/1993			Great Britain: LKZ = 7				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
		100	Conf. Aux.	100	Conf. Aux.	-	-
		Cont.	Quiet	10000	Pause		
				100	Conf. Aux.		
				100	Pause		
				100	Conf. Aux.		
			-	Cont.	Quiet	-	-

Dial Tone Receiver (DTR)			
		SIU SIUCO	V3.1 V3.2
Date: 13/09/1990		Great Britain: LKZ = 7	
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		7	7
Type (time evaluation)		1	1
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	600 ms	600 ms
Pulse min.	(T2)	165 ms	165 ms
Pulse max.	(T3)	500 ms	500 ms
Pause min.	(T4)	270 ms	270 ms
Pause max.	(T5)	650 ms	650 ms
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		
Pulse max. + pause max.	(T2)		
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.11 Greece

Tone Table						
					SIU SIUCO	V3.1 V3.2
Date: 16/02/1994			Greece: LKZ = R			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	7	0			
1	Int. Dial	0	425	2	<u>200/300/200/300/200/800</u>	-3
2	Ext. Dial	1	425	1	<u>200/300/700/800</u>	-3
3	Special Dial	8	425 + 400		Continuous	-3
4	Ring	2	425		<u>1000/4000</u>	-3
5	Busy	3	425		<u>160/440</u>	-3
6	Override	4	425		<u>200/300/200/1300</u>	-14
7	Camp On	5	425		<u>100/1900</u>	-14
8	Number Unobtainable	11	950/1400/1800		<u>320/320/320/960</u>	-3
9	Data Call	6	1300		<u>600/1800</u>	+1
10	Pos. Acknowledge	-				
11	Congestion	-				
12	Conference	-				
13	Ext. Dial 2 (simulated)	-				
14	Neg. Acknowledge	-				
15	-	-				
23	-	-				
24	Conference Aux.	9	425		Continuous	-14
25	-	-				
26	LCR Tone		1800		<u>340/200/340/200/340/1000</u>	-3

Conference Tones							
					SIUCO SCC	V3.2 V3.3	
Date: 30/03/1993			Greece (Federal Republic of Germany): LKZ = 0				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
200	Conf. Aux.	Cont.	Camp On	Cont.	Camp On	Cont.	Override
300	Pause	-	-	-	-	-	-
200	Conf. Aux.	-	-	-	-	-	-
Cont.	Quiet	-	-	-	-	-	-

Dial Tone Receiver (DTR)			
		SIUCO	V3.3+
Date: 07/09/1993	Czech Republic (Greece): LKZ = J		
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		4	4
Type (time evaluation)		1	2
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	450 ms	
Pulse min.	(T2)	140 ms	
Pulse max.	(T3)	180 ms	
Pause min.	(T4)	420 ms	
Pause max.	(T5)	460 ms	
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		800 ms
Pulse max. + pause max.	(T2)		1000 ms
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.12 Commonwealth of Independant States (CIS)

Tone Table						
						SIUX V3.4
Date: 12.5.1997			CIS: LKZ = 13			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	-	0			
1	Int. Dial	8	425	1,2	Continuous	-10
2	Special Dial	9	400 + 425		Continuous	-10
3	Waiting (Warning back)	3	425		200/5000	-10
4	Ring back	10	425		1000/4000	-10
5	Busy	0	425		360/360	-10
6	Override	1	425		240/240/240/1300	-15
7	Warning = Camp On (Call waiting)	2	425		200/5000	-15
8	Number Unobtainable	11	950/1400/1800		340/340/340/1000	-10
9	Howler tone	5	1400/2060/2450		1000/1000/1000/1000	+0,66
10	Pos. Acknowledge	-				
11	Congestion	6	425		180/180	-10
12	Conference	-				
13	Checking tone	7	700		Continuous	-4
14	Neg. Acknowledge	-				
15	-	-				
23	Alarm	-				
24	Conference Aux.	4	425		Continuous	-15
25	-	-				
26	LCR Tone	12	1800		340/200/340/200/340/1000	-10

All acoustic signal levels sending during conversation should be minus 15 dBm0 +/-5 dBm0.

Conference Tones							
						SIUX V3.4	
Date: 14/05/1996			CIS: LKZ = 13				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
500	Conf.Aux	Cont.	Camp On	Cont.	Camp On	Cont.	Override
Cont.	Quiet	-	-	-	-	-	-

Conference Tones							
						SIUX	V3.4
Date: 14/05/1996			CIS: LKZ = 13				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-

Dial Tone Receiver (DTR)			
		SIUX	V3.3+
Date: 10/1/1997		CIS: LKZ= 13	
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		C	C
Type (time evaluation)		1	1
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	800 ms	800 ms
Pulse min.	(T2)	150 ms	150 ms
Pulse max.	(T3)	500 ms	500 ms
Pause min.	(T4)	100 ms	100 ms
Pause max.	(T5)	500 ms	500 ms
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		
Pulse max. + pause max.	(T2)		
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.13 Hong Kong

Tone Table						
						SIUX V3.4
Date: 26/1/1994			Hong Kong: LKZ = S			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	-	0			
1	Int. Dial	0	400		Continuous	-9
2	Ext. Dial	9	350 + 440		Cont.	-9
3	Special Dial	6	400		400/40	-9
4	Ring	10	440 + 480		400/200/400/3000	-10
5	Busy	11	480 + 620		500/500	-10
6	Override	3	450		200/200/200/600	-19
7	Camp On	4	450		400/4000	-19
8	Number Unobtainable	8	480 + 620		Continuous	-10
9	Data Call	-				
10	Pos. Acknowledge	1	450	1,2	Continuous	-9
11	Congestion	7	450		700/700	-9
12	Conference	-				
13	Ext. Dial 2 (simulated)	-				
14	Neg. Acknowledge	5	425		200/200	-9
15	Für ersten Freiton	13	440 + 480		Dauer	-9
23		-				
24	Conference Aux.	2	450		Continuous	-19
25	-	-				
26	LCR Tone		1800		340/200/340/200/340/1000	-9

Angaben sind Einzelton-Pegel. Bei den Doppeltönen ist das Summensignal 3 dB lauter.

Conference Tones							
						SIUCO SCC	V3.2 V3.3
Datum: 26/01/1994			Hong Kong: LKZ = S				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
200	Conf. Aux.	Cont.	Camp On	Cont.	Camp On	Cont.	Override
300	Quiet	-	-	-	-	-	-

Conference Tones							
						SIUCO SCC	V3.2 V3.3
Datum: 26/01/1994			Hong Kong: LKZ = S				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
200	Conf. Aux.	-	-	-	-	-	-
Cont.	Quiet	-	-	-	-	-	-

Dial Tone Receiver (DTR)			
		SIUCO	V3.3+
Date: 27/01/1994		Hong Kong: LKZ = S	
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		7	7
Type (time evaluation)		1	1
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	900 ms	900 ms
Pulse min.	(T2)	450 ms	450 ms
Pulse max.	(T3)	770 ms	770 ms
Pause min.	(T4)	450 ms	450 ms
Pause max.	(T5)	770 ms	770 ms
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		
Pulse max. + pause max.	(T2)		
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.14 Indonesia

Tone Table						
						SIU SIUCO V3.1 V3.2
Datum: 27/08/1993			Indonesia: LKZ = N			
TSL	Ton Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	-	0			
1	Int. Dial	8	350 + 450		Cont.	-5
2	Ext. Dial	4	425	1,2	Cont.	-10
3	Special Dial	11	425 + 400		Cont.	-5
4	Ring	10	425		<u>1000</u> /4000	-10
5	Busy	0	425		<u>500</u> /500	-10
6	Override	1	425		<u>200</u> /300/ <u>200</u> /1300	-16
7	Camp On	-				
8	Number Unobtainable	5	950/1400/1800		<u>340</u> / <u>340</u> / <u>340</u> /1000	-10
9	Data Call	-				
10	Pos. Acknowledge	2	425		<u>40</u> /40	-5
11	Congestion	9	425		<u>250</u> /250	-10
12	Conference	-				
13	Ext. Dial 2 (simulated)	-				
14	Neg. Acknowledge	6	425		<u>100</u> /200	-10
15	-	-				
23	-	-				
24	Conference Aux.	3	425		Cont.	-16
25	-	-				
26	LCR Tone		1800		<u>340</u> / <u>200</u> / <u>340</u> / <u>200</u> / <u>340</u> /1000	-5

Conference Tones							
						SIUCO SCC V3.2 V3.3	
Date: 27/08/1993			Indonesia: LKZ = N				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
1000	Ext. Dial	100	Ext. Dial	100	Ext. Dial	Cont.	Override
Cont.	Quiet	10000	Pause	100	Pause		
		100	Ext. Dial	100	Ext. Dial		
		Cont.	Quiet	10000	Pause		

Conference Tones							
						SIUCO SCC	V3.2 V3.3
Date: 27/08/1993			Indonesia: LKZ = N				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
				100	Ext. Dial		
				100	Pause		
				100	Ext. Dial		
				Cont.	Quiet		

Dial Tone Receiver (DTR)			
		SIUCO	V3.3+
Datum: 13/09/1990		China (Indonesia): LKZ = C	
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		4	4
Type (time evaluation)		1	1
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	900 ms	900 ms
Pulse min.	(T2)	310 ms	310 ms
Pulse max.	(T3)	770 ms	770 ms
Pause min.	(T4)	310 ms	310 ms
Pause max.	(T5)	770 ms	770 ms
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		
Pulse max. + pause max.	(T2)		
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.15 India

Tone Table						
						SIU SIUCO
						V3.3+ V3.4
Date: 31/07/1995			India (GBR): LKZ = 7			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	7	0			
1	Int. Dial	8	400 + 450		Continuous	-6
2	Ext. Dial 1	9	350 + 440		Continuous	-6
3	Special Dial	11	440 + 480		<u>200/300/200/300/200/800</u>	-6
4	Ring Back	10	400 + 450		<u>400/200/400/2000</u>	-11
5	Busy	0	425		<u>380/380</u>	-14,5
6	Override	1	1400		<u>200/1500</u>	-10
7	Camp On	-				
8	Number Unobtainable	5	400	1,2	Continuous	-14,5
9	Data Call	-				
10	Pos. Acknowledge	2	520/400		<u>340/340/800</u>	-6
11	Congestion	4	425		<u>400/360/220/520</u>	-6
12	Conference	-				
13		-				
14	Neg. Acknowledge	6	400/520		<u>340/340/800</u>	-6
15		-				
23		-				
24	Conference Aux.	3	1400		Continuous	-10
25		-				
26	LCR Tone	-				

Conference Tones							
						SIUCO SCC	V3.2 V3.3
Date: 25/07/1995			India (GBR): LKZ = 7				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
2000	Conf. Aux.	100	Conf. Aux.	100	Conf. Aux.	Cont.	Override
Cont.	Idle	10000	Idle	100	Idle	-	-
		100	Conf. Aux.	100	Conf. Aux.	-	-
		Cont.	Idle	10000	Pause		

Conference Tones							
						SIUCO SCC	V3.2 V3.3
Date: 25/07/1995			India (GBR): LKZ = 7				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
				100	Conf. Aux.		
				100	Idle		
				100	Conf. Aux.		
			-	Cont.	Idle	-	-

Dial Tone Receiver (DTR)			
			V3.3
Date: 25/07/1995		India: LKZ = 11	
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		5	5
Type (time evaluation)		1	1
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	1000 ms	1000 ms
Pulse min.	(T2)	150 ms	150 ms
Pulse max.	(T3)	900 ms	900 ms
Pause min.	(T4)	150 ms	150 ms
Pause max.	(T5)	900 ms	900 ms
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		
Pulse max. + pause max.	(T2)		
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.16 Israel

Tone Table						
						SIUCO V3.4
Date: 7/2/1997			Israel: LKZ = 15			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	-	0			
1	Int. Dial	10	400 + 450		Continuous	-6
2	Ext. Dial	1	400	1,2	Continuous	-6
3	Waiting (Warning back)	11	400 + 450		200/300/200/300/200/800	-6
4	Ring back	2	400		1000/3000	-6
5	Busy	3	400		500/500	-6
6	Override	8	400 + 450		100/1000	-10
7	Camp On					
8	Number Unobtainable	4	950/1400/1800		340/340/340/1000	-6
9	Data Call					
10	Pos. Acknowledge	9	400 + 450		60/40	-10
11	Congestion	5	400		260/240	-6
12	Conference					
13	-					
14	Neg. Acknowledge					
15	Test	6	800		Continuous	0
23	-					
24	Conference Aux.	7	1400		Continuous	-10
25	-					
26	LCR Tone	12	1800		340/200/340/200/340/1000	-6

Externe Dial Tone, Ring Back, Busy and Congestion are in accordance with frequencies of the CO.

DTMF level : fu = -7,2 dBm0; fo = -5,2 dBm0

Conference Tones							
						SIUCO V3.4	
Datum: 7/2/1997			Israel: LKZ = 15				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
200	Conf. Aux.	100	Conf. Aux.	100	Conf. Aux.	Cont.	Override
Cont.	Silent	10000	Silent	100	Silent	-	-

Conference Tones							
						SIUCO	V3.4
Datum: 7/2/1997			Israel: LKZ = 15				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
-	-	100	Conf. Aux.	100	Conf. Aux.	-	-
-	-	Cont.	Silent	10000	Silent	-	-
-	-	-	-	100	Conf. Aux.	-	-
-	-	-	-	100	Silent	-	-
-	-	-	-	100	Conf. Aux.	-	-
-	-	-	-	Cont.	Silent	-	-
-	-	-	-	-	-	-	-

Dial Tone Receiver (DTR)			
		SIUCO	V3.4
Date: 7/2/1997		Israel: LKZ = 15	
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		5	5
Type (time evaluation)		1	1
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	650	650
Pulse min.	(T2)	200	200
Pulse max.	(T3)	600	600
Pause min.	(T4)	200	200
Pause max.	(T5)	600	600
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		
Pulse max. + pause max.	(T2)		
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.17 Italy

Tone Table						
						SIUCO SIUCX V3.2 V3.4
Date: 06/06/1996			Italy: LKZ = D			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	-	0			
1	Int. Dial	10	350 + 425		Continuous	-6
2	Ext. Dial	0	425		<u>200</u> /200/ <u>600</u> /1000	-6
3	Special Dial ENEL Dial BASA Busy	11	425	1	Continuous	-6
4	Ring Back	1	425		<u>1000</u> /4000	-6
5	Busy	2	425	2	<u>500</u> /500	-6
6	Override	3	425		<u>200</u> /200/ <u>200</u> /1400	-11
7	Camp On	4	425		<u>100</u> /4900	-11
8	BASA Intern Dial	12	425		<u>200</u> /200/ <u>200</u> /200/ <u>200</u> /1000	-6
9	BASA + ENEL Hold	13	425		<u>200</u> /200/ <u>200</u> /3400	-6
10	Pos. Acknowledge	8	425		<u>100</u> /100/ <u>100</u> /100/ <u>100</u> /1500	6
11	Congestion	6	425		<u>200</u> /200	-6
12	Conference	7	425		<u>200</u> /9800	-11
13	-	-				
14	-	-				
15	-	-				
23	Reorder	9	425		<u>100</u> /100	-6
24	Conference Aux.	5	425		Continuous	-11
25	-	-				
26	LCR Tone	14	1800		<u>340</u> /200/ <u>340</u> /200/ <u>340</u> /1000	-6

Basa Internal Dial, Hold and LCR are not generated on the hardware of SIUCO, but only on the SIUX and SIUCX of V3.4

Conference Tones							
						SIUCO SCC	V3.2 V3.3
Date: 30/03/1993			Italy: LKZ = D				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Ton Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
200	Conf. Aux.	Cont.	Camp On	Cont.	Camp On	Cont.	Override
Cont.	Conf. Aux.	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-

Dial Tone Receiver (DTR)			
		SIUCO	V3.3+
Date: 13/09/1990		Italy: LKZ = D	
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		1	6
Type (time evaluation)		1	1
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	520 ms	520 ms
Pulse min.	(T2)	480 ms	480 ms
Pulse max.	(T3)	500 ms	500 ms
Pause min.	(T4)	480 ms	480 ms
Pause max.	(T5)	500 ms	500 ms
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		
Pulse max. + pause max.	(T2)		
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.18 Japan

Tone Table						
						SIUX V3.5
Date: 16.9.1997			Japan: LKZ = 18			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	-	0			
1	Int. Dial	0	400		<u>260/240/260/240/260/800</u>	-10
2	Ext. Dial	1	400	1	Continuous	-10
3	Special Dial	8	390 + 410		Continuous	-10
4	Ring Back	2	390 + 410		<u>1000/2000</u>	-10
5	Busy	3	400		<u>500/500</u>	-10
6	Override	4	400		<u>200/300/200/1300</u>	-20
7	Camp On	5	400		<u>100/1900</u>	-20
8	Number Unobtainable	11	950/1400/1800		<u>320/320/320/960</u>	-10
9	Data Call	6	1300		<u>600/1800</u>	-10
10	Pos. Acknowledge	-				
11	Congestion	-				
12	Conference	-				
13	Ext. Dial 2 (simulated)	-				
14	Neg. Acknowledge	-				
15	-	-				
23		-				
24	Conference Aux.	9	400		Continuous	-20
25	-	-				
26	LCR Tone	12	1800		<u>340/200/340/200/340/1000</u>	-10

Conference Tones							
						SIUX	V3.5
Date: 15.9.1997			Japan: LKZ = 18				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
200	Conf. Aux.	Cont.	Camp On	Cont.	Camp On	Cont.	Override
300	Pause	-	-	-	-	-	-
200	Conf. Aux.	-	-	-	-	-	-
Cont.	Quiet	-	-	-	-	-	-

DTMF levels: -5.2 / -7.2 dBm0 (High/Low group)

The tone plan has not yet been assessed by the licensing authority, but only planning for development for the loadware.

Dial Tone Receiver (DTR)			
		SIUX	V3.5
Date: 16/9/1997	Japan: LKZ = 18		
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		5	5
Type (time evaluation)		1	1
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	700 ms	700 ms
Pulse min.	(T2)	400 ms	400 ms
Pulse max.	(T3)	600 ms	600 ms
Pause min.	(T4)	400 ms	400 ms
Pause max.	(T5)	600 ms	600 ms
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		
Pulse max. + pause max.	(T2)		
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.19 Cameroon

Tone Table						
						SIU SIUCO SICOE
						V3.3+ V3.3+ V3.5
Date: 10/10/1996			Cameroon: LKZ = 14			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	-	0		Continuous	
1	Int. Dial	9	425	1	Continuous	-6
2	Ring- and Dial Tone	7	600		Continuous	-6
3	Special Dial	8	425 / 425+340		1100/1100	-2.9
4	Ring Back	2	425		1000/4000	-6
5	Busy	3	425	2	500/500	-6
6	Override	4	1400		200/2000	-13.5
7	Camp On	5	425		200/200/200/4000	-13.5
8	Number Unobtainable	11	950/1400/1800		340/340/340/1000	-6
9	Data Call	6	1300		600/1800	-1
10	Pos. Acknowledge	-				
11	Congestion	10	425		200/200	-6
12	Conference	-				
13	-	-				
14	-	-				
15	-	-				
23	Busy 2	1	600		500/500	-6
24	Conference Aux.	0	425		Continuous	-13.5
25	-	-				
26	LCR Tone	12	1800		340/200/340/200/340/1000	-6

RTO tests:

RTO-Test:	
1	Continuous tone, suitable for testing the dial tone receiver and for loopback testing of trunk and SLMA
2	Cadenced tone for testing the busy tone receiver

Conference Tones							
						SIUCO SICOE	V3.3+ V3.5
Date: 10/10/1996			Cameroon: LKZ = 14				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
200	Conf. Aux.	Cont.	Camp On	Cont.	Camp On	Cont.	Override
2000	Idle Channel	-	-	-	-	-	-
200	Conf. Aux.	-	-	-	-	-	-
Cont.	Idle Channel	-	-	-	-	-	-

Dial Tone Receiver (DTR)			
		SIU SIUCO SICOE	V3.3+ V3.3+ V3.5
Date: 10/10/1996		Cameroon: LKZ = 14	
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		4	4
Type (time evaluation)		1	1
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	800 ms	800 ms
Pulse min.	(T2)	300 ms	300 ms
Pulse max.	(T3)	700 ms	700 ms
Pause min.	(T4)	300 ms	300 ms
Pause max.	(T5)	700 ms	700 ms
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		
Pulse max. + pause max.	(T2)		
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.20 Corea

Tone Table						
						SIUX V3.4
Version: 14.5.1997			South Korea: LKZ = 16			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	-	0			
1	Int. Dial	0	350 + 440		1000 / 260	-10
2	Ext. Dial 1	1	350 + 440	1,2	Continuous	-10
3	Special Dial		-			
4	Ring back	2	440 + 480		1000 / 2000	-15
5	Busy	3	480 + 620		500 / 500	-15
6	Intrusion	4	440		260 / 14 000	-20
7	Camp On	5	440 + 480		200 / 2000	-20
8	Number Unobtainable		-			
9	Data Call		-			
10	Pos. Acknowledge		-			
11	Congestion	6	480 + 620		300 / 200	-15
12	Conference		-			
13	-		-			
14	Neg. Acknowledge		-			
15	First Ring	7	440 + 480		Continuous	-15
23	Test Tone	10	1014		Continuous	0
24	Conference Aux.	8	440		Continuous	-20
25	-		-			
26	LCR Tone	9	1800		340/200/340/200/340/1000	-15

This version is not yet approved by the customer

Conference Tones							
						SIUX V3.4	
Datum: 18.7.1996			South Korea: LKZ = 16				
Conference		Camp On		Night Subscriber Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
500	Conf.Aux	Cont.	Camp On	Cont.	Camp On	500	Conf. Aux.
Cont.	Quiet	-	-	-	-	6000	Quiet
-	-	-	-	-	-	Cont.	Override

Conference Tones							
						SIUX	V3.4
Datum: 18.7.1996			South Korea: LKZ = 16				
Conference		Camp On		Night Subscriber Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
-	-	-	-	-	-	-	-

Dial Tone Receiver (DTR)			
Date: 18.7.1996		South Korea: LKZ = 16	
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		2	2
Type (time evaluation)		1	1
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	800 ms	800 ms
Pulse min.	(T2)	160 ms	160 ms
Pulse max.	(T3)	760ms	760 ms
Pause min.	(T4)	160ms	160 ms
Pause max.	(T5)	760ms	760 ms

7.21 Malaysia

Tone Table						
						SIU SIUCO V3.1 V3.2
Date: 03/08/1993			Malaysia: LKZ = E			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	-	0			
1	Int. Dial	0	425	2	Continuous	-5
2	Ext. Dial	9	425	1	Continuous	-7
3	Special Dial	8	425 + 400		Continuous	-5
4	Ring	2	425		<u>400/200/400/2000</u>	-10
5	Busy	3	425		<u>500/500</u>	-10
6	Override	4	425		<u>200/200/200/5000</u>	-16
7	Camp On	-				
8	Number Unobtainable	5	425		<u>2500/500</u>	-10
9	Data Call	-				
10	Pos. Acknowledge	11	425		<u>40/40</u>	-5
11	Congestion	1	425		<u>500/250</u>	-10
12	Conference	6	425		Continuous	-10
13	Ext. Dial 2 (simulated)	-				
14	Neg. Acknowledge	7	425		<u>100/200</u>	-10
15	-	-				
23	-	-				
24	Conference Aux.	10	425		Continuous	-16
25	-	-				
26	LCR Tone	-	1800		<u>340/200/340/200/340/1000</u>	-7

Conference Tones							
						SIUCO SCC V3.2 V3.3	
Date: 03/08/1993			Malaysia: LKZ = E				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
1000	Conference	100	Conference	100	Conference	200	Conf. Aux.
Cont.	Quiet	10000	Idle Channel	100	Idle Channel	200	Idle Channel
		100	Conference	100	Conference	200	Conf. Aux.
		Cont.	Quiet	10000	Idle Channel	Cont.	Override

Conference Tones							
						SIUCO SCC	V3.2 V3.3
Date: 03/08/1993			Malaysia: LKZ = E				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
				100	Conference		
				100	Idle Channel		
				100	Conference		
				Cont.	Quiet		-

Dial Tone Receiver (DTR)			
			SIUCO V3.3+
Date: 13/09/1990	China (Malaysia): LKZ = C		
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		4	4
Type (time evaluation)		1	1
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	900 ms	900 ms
Pulse min.	(T2)	310 ms	310 ms
Pulse max.	(T3)	770 ms	770 ms
Pause min.	(T4)	310 ms	310 ms
Pause max.	(T5)	770 ms	770 ms
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		
Pulse max. + pause max.	(T2)		
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.22 Morocco

Tone Table						
					SIU SIUCO	V3.1 V3.2
Date: 20/06/1994			Morocco: LKZ = T			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	-	0			
1	Int. Dial	0	330		Continuous	-8
2	Ext. Dial	1	440	1	Continuous	-11
3	Special Dial	8	440 / 440+330		<u>750</u> /750	-8/-11
4	Ring	2	440		<u>1500</u> /3500	-11
5	Busy	3	440		<u>500</u> /500	-11
6	Override	4	440		<u>200</u> /200/ <u>200</u> /1400	-11
7	Camp On	5	440		<u>300</u> /30000	-11
8	Number Unobtainable	11	440/330/440		<u>350</u> / <u>350</u> / <u>350</u> /500	-11
9	Data Call	-				
10	Pos. Acknowledge	6	330		<u>50</u> /50	-8
11	Congestion	-				
12	Conference	-				
13	Ext. Dial 2 (simulated)	9	600	2	Continuous	-6
14	Neg. Acknowledge	-				
15	Test	7/10	800		Continuous	-2
23		-				
24	Conference Aux.	10/7	440		Continuous	-11
25	-	-				
26	LCR Tone	-	1800		<u>340</u> /200/ <u>340</u> /200/ <u>340</u> /1000	

Conference Tones							
					SIUCO SCC	V3.2 V3.3	
Date: 06/07/1994			Morocco: LKZ = T				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
200	Conf. Aux.	300	Ext. Dial	300	Ext. Dial	Cont.	Override
300	Pause	1000	Pause	1000	Pause	-	-
200	Conf. Aux.	Cont.	Camp On	Cont.	Camp On	-	-
Cont.	Quiet	-	-	-	-	-	-

Dial Tone Receiver (DTR)			
		SIUCO	V3.3+
Date: 17/05/1994	Morocco: LKZ = T		
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		1	2, 9
Type (time evaluation)		1	1
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	1200 ms	200 ms
Pulse min.	(T2)	400 ms	80 ms
Pulse max.	(T3)	600 ms	100 ms
Pause min.	(T4)	400 ms	80 ms
Pause max.	(T5)	600 ms	1200 ms
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		
Pulse max. + pause max.	(T2)		
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

HZE Mode 2 for SIU, HZE Mode 9 for SIUCO, SIUX etc.

7.23 Mexico

Tone Table						
						SIU SIUCO V3.1 V3.2
Date: 27/08/1993			Mexico: LKZ = G			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	7	0			
1	Int. Dial	9	425	1,2	Continuous	-10
2	Ext. Dial	-				
3	Special Dial	8	425		1400/100	-10
4	Ring	2	425		1000/400	-10
5	Busy	3	425		250/250	-10
6	Override	4	1400		200/2000	-13,5
7	Camp On	5	425		160/140/160/4000	-15
8	Number Unobtainable	11	950/1400/1800		340/340/340/1000	-10
9	Data Call	6	1300		600/1800	-1
10	Pos. Acknowledge	-				
11	Congestion	-				
12	Conference	-				
13	Ext. Dial 2 (simulated)	10				
14	Neg. Acknowledge	-				
15	-	-				
23	Conference Aux. 2	1	1400		Continuous	-13,5
24	Conference Aux.	0	425		Continuous	-15
25	-	-				
26	LCR Tone	-	1800		340/200/340/200/340/1000	

Conference Tones							
						SIUCO SCC V3.2 V3.3	
Date: 30/03/1993			Mexico: LKZ = G				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
200	Conf. Aux. 2	Cont.	Camp On	Cont.	Camp On	Cont.	Override
2000	Pause						
200	Conf. Aux. 2						
Cont.	Quiet						

Dial Tone Receiver (DTR)			
		SIUCO	V3.3+
Date: 22/07/1991	Mexico (Portugal): LKZ = 9		
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		1	7
Type (time evaluation)		1	1
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	1200 ms	1200 ms
Pulse min.	(T2)	120 ms	120 ms
Pulse max.	(T3)	600 ms	600 ms
Pause min.	(T4)	200 ms	200 ms
Pause max.	(T5)	600 ms	600 ms
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		
Pulse max. + pause max.	(T2)		
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.24 Netherlands

Tone Table						
						SIU SIUCO V3.4 V3.4
Date: 22/04/1996			Netherlands: LKZ = B			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	7	0			
1	Int. Dial	0	425	2	Continuous	-3
2	Ext. Dial	9	150 + 450	1	Continuous	-3
3	Special Dial	8	425 + 400		Continuous	-3
4	Ring	2	425		<u>1000</u> /4000	-3
5	Busy	3	425		<u>500</u> /500	-3
6	Override	4	425		<u>200</u> /300/ <u>200</u> /1300	-14
7	Camp On	5	425		<u>100</u> /1900	-14
8	Umber Unobtainable	11	950/1400/1800		<u>340</u> / <u>340</u> / <u>340</u> /1000	-3
9	Data Call	10	1300		<u>600</u> /1800	+0,66
10	Pos. Acknowledge	-				
11	Congestion	1	425		<u>250</u> /250	-3
12	Conference	-				
13	Ext. Dial 2 (simulated)	-				
14	Neg. Acknowledge	-				
15	-	-				
23	Alarm	-				
24	Conference Aux.	6	425		Continuous	-14
25	-	-				
26	LCR Tone	12	1800		<u>340</u> / <u>200</u> / <u>340</u> / <u>200</u> / <u>340</u> /1000	-3

Conference Tones							
						SIUCO SCC V3.2 V3.3	
Date: 30/03/1993			Netherlands: LKZ = B				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
200	Conf. Aux.	Cont.	Camp On	Cont.	Camp On	Cont.	Override
300	Pause	-	-	-	-	-	-
200	Conf. Aux.	-	-	-	-	-	-
Cont.	Quiet	-	-	-	-	-	-

Dial Tone Receiver (DTR)			
		SIUCO	V3.3+
Date: 13/09/1990	Netherlands: LKZ = B		
		2st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		6	1
Type (time evaluation)		1	1
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	1020 ms	1020 ms
Pulse min.	(T2)	180 ms	180 ms
Pulse max.	(T3)	600 ms	600 ms
Pause min.	(T4)	160 ms	160 ms
Pause max.	(T5)	620 ms	620 ms
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		
Pulse max. + pause max.	(T2)		
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.25 Austria

Tone Table						
						SIU SIUCO
						V3.1 V3.2
Date: 28/10/1994			Austria: LKZ = 1			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	-	0			
1	Int. Dial	0	425	2	<u>200/300/200/300/200/800</u>	-3,4
2	Ext. Dial	1	425	1	Continuous	-3,4
3	Special Dial	8	425 + 400		Continuous	-3,4
4	Ring	2	425		<u>1000/4000</u>	-3,4
5	Busy	3	425		<u>300/300</u>	-3,4
6	Override	4	425		<u>200/300/200/1300</u>	-10,4
7	Camp On	5	425		<u>100/1900</u>	-8,4
8	Number Unobtainable	11	950/1400/1800		<u>320/320/320/960</u>	-3,4
9	Data Call	6/10	1300		<u>600/1800</u>	-0,4
10	Pos. Acknowledge	-				
11	Congestion	-				
12	Conference	-				
13	Ext. Dial 2 (simulated)	-				
14	Neg. Acknowledge	-				
15	Test Tone (only for CIS)	7	700		Continuous	-4,0
23	Conf. Aux. 2	10/6	425		Continuous	-10,4
24	Conf. Aux.	9	425		Continuous	-8,4
25	-	-				
26	LCR Tone					

Conference Tones							
						SIUCO SCC	V3.2 V3.3
Date: 30/03/1993			Austria: LKZ = 1				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
200	Conf. Aux. 2	Cont.	Camp On	Cont.	Camp On	Cont.	Override
300	Pause	-	-	-	-	-	-
200	Conf. Aux. 2	-	-	-	-	-	-
Cont.	Quiet	-	-	-	-	-	-

Dial Tone Receiver (DTR)			
		SIUCO	V3.3+
Date: 30/03/1995	Austria: LKZ = 1		
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		4	4
Type (time evaluation)		1	2
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	500 ms	
Pulse min.	(T2)	100 ms	
Pulse max.	(T3)	150 ms	
Pause min.	(T4)	100 ms	
Pause max.	(T5)	150 ms	
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		800 ms
Pulse max. + pause max.	(T2)		1200 ms
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.26 Oman

Tone Table						
						SIU SIUCO V3.3+ V3.3+
Date: 17/11/1995			Oman: LKZ = 12			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	-	0			
1	Int. Dial	9	350 + 440		Continuous	-13
2	Ext. Dial 1	5	425	1.2	Continuous	-5
3	Operator Call	4	440		Continuous	-13
4	Ring	10	400 + 480		<u>1000</u> /2000	-17
5	Busy	11	480 + 620		<u>500</u> /500	-22
6	Intrusion	6	440		<u>260</u> /14000	-24
7	Service Set	0	480		Continuous	-24
8	Number Unobtainable	1	425		<u>200</u> /300	-13
9	Data Call	-				
10	Pos. Acknowledge	-				
11	Congestion	8	480 + 620		<u>240</u> /260	-24
12	Conference	-				
13	Message Waiting	2	440		<u>1240</u> /260	-13
14	Neg. Acknowledge	-				
15	-	-				
23	Alarm	-				
24	Conference Aux.	7	440		Continuous	-24
25	-	-				
26	LCR Tone	12	1800		<u>340</u> /200/ <u>340</u> /200/ <u>340</u> /1000	-13

Conference Tones							
						SIUCO SIU V3.3+ V3.3+	
Date: 17/11/1995			Oman: LKZ = 12				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
500	Conf. Aux.	100	Conf. Aux.	-	-	500	Conf. Aux.
Cont.	Quiet	10000	Quiet	-	-	6000	Quiet
-	-	100	Conf. Aux.	-	-	Cont.	Override
-	-	Cont.	Quiet	-	-	-	-

NOTE: DTMF: DTMF tones for Oman are set to LKZ=5 with AMO-ZAND command.

Dial Tone Receiver (DTR)			
		SIUCO	V3.3+
Date: 13/09/1990	Oman (China): LKZ = C		
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		4	4
Type (time evaluation)		1	1
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	900 ms	900 ms
Pulse min.	(T2)	310 ms	310 ms
Pulse max.	(T3)	770 ms	770 ms
Pause min.	(T4)	310 ms	310 ms
Pause max.	(T5)	770 ms	770 ms
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		
Pulse max. + pause max.	(T2)		
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.27 Pakistan

Dial Tone Receiver (DTR)			
		SIUCO	V3.5
Date: 11.5.1998	Pakistan: LKZ = 28		
		1st DTR und 2nd DTR	3rd DTR und 4th DTR
Mode (filter selection)		D	D
Type (time evaluation)		1	1
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	600 ms	600 ms
Pulse min.	(T2)	225 ms	225 ms
Pulse max.	(T3)	330 ms	330 ms
Pause min.	(T4)	315 ms	315 ms
Pause max.	(T5)	880 ms	880 ms
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		
Pulse max. + pause max.	(T2)		
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

NOTE: Note concerning RTO tests: In Pakistan the tone table LKZ=0 (BRD) is in use. There are two RTO tests recommended. But for this receiver table with LKZ=28 (PAK) install **only** test 1.

Pakistan

7.28 Philippines

Tone Table						
						SIU SIUCO
						V3.1 V3.2
Date: 15.5.1997			Philippines: LKZ = P			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	-	0			
1	Int. Dial	8	400 + 450		Continuous	-7
2	Ext. Dial	4	425	1	Continuous	-10
3	Special Dial	11	425 + 480		Continuous	-5
4	Ring	10	425 + 480		<u>1000</u> /4000	-5
5	Busy	0	400		<u>500</u> /500	-10
6	Override	1	425		<u>200</u> /300/ <u>200</u> /1300	-16
7	Camp On	-				
8	Number Unobtainable	5	950/1400/1800		<u>340</u> / <u>340</u> / <u>340</u> /1000	-10
9	Data Call	-				
10	Pos. Acknowledge	2	425		<u>1000</u> /4000	-5
11	Congestion	9	480 + 620		<u>240</u> /260	-10
12	Conference	-				
13	Ext. Dial 2 (simulated)	-				
14	Neg. Acknowledge	6	425		<u>100</u> /200	-10
15	-	-				
23	-	-				
24	Conference Aux.	3	425		Continuous	-16
25	-	-				
26	LCR Tone	12	1800		<u>340</u> / <u>200</u> / <u>340</u> / <u>200</u> / <u>340</u> /1000	-3

Conference Tones							
						SIUCO SCC	V3.2 V3.3
Date: 27/08/1993			Philippines: LKZ = P				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
1000	Ext. Dial	100	Ext. Dial	100	Ext. Dial	Cont.	Override
Cont.	Quiet	10000	Pause	100	Pause		
		100	Ext. Dial	100	Ext. Dial		
		Cont.	Quiet	10000	Pause		

Conference Tones							
						SIUCO SCC	V3.2 V3.3
Date: 27/08/1993			Philippines: LKZ = P				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
				100	Ext. Dial		
				100	Pause		
				100	Ext. Dial		
				Cont.	Quiet		

Dial Tone Receiver (DTR)			
		SIUCO	V3.3+
Date: 13/09/1990		Philippines (Federal Republic of Germany): LKZ = 0	
		1st dTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		1	1
Type (time evaluation)		1	2
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	500 ms	
Pulse min.	(T2)	160 ms	
Pulse max.	(T3)	250 ms	
Pause min.	(T4)	250 ms	
Pause max.	(T5)	440 ms	
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		800 ms
Pulse max. + pause max.	(T2)		1000 ms
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.29 Poland

Tone Table						
					SIU SIUCO	V3.1 V3.2
Date: 09/11/1992			Poland: LKZ = F			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	7	0			
1	Int. Dial	9	425	1,2	Continuous	-10
2	Ext. Dial	-				
3	Special Dial	8	425		<u>1400</u> /100	-10
4	Ring	2	425		<u>1000</u> /4000	-10
5	Busy	3	425		<u>500</u> /500	-10
6	Override (warning tone)	4	425		<u>100</u> /4900	-12
7	Camp On(call waiting tone)	5	425		<u>160</u> /140/ <u>160</u> /4000	-12
8	Number Unobtainable	11	950/1400/1800		<u>340</u> / <u>340</u> / <u>340</u> /1000	-10
9	Data Call	-				
10	Pos. Acknowledge	-				
11	Congestion	-				
12	Conference	-				
13	Ext. Dial 2 (simulated)	10	425 + 330		Continuous	-10
14	Neg. Acknowledge	-				
15	-	-				
23	Conference Aux. 2	-				
24	Conference Aux.	0	425		Continuous	-12
25	-	-				
26	LCR Tone	-	1800		<u>340</u> /200/ <u>340</u> /200/ <u>340</u> /1000	

Conference Tones							
					SIUCO SCC	V3.2 V3.3	
Date: 30/03/1993			Poland: LKZ = F				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Ton Tone
Cont.	Pause	Cont.	Camp On	Cont.	Camp On	Cont.	Override

Dial Tone Receiver (DTR)			
		SIUCO	V3.3+
Date: 13/09/1993	Poland (Netherlands): LKZ = B		
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		6	1
Type (time evaluation)		1	1
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	1020 ms	1020 ms
Pulse min.	(T2)	180 ms	180 ms
Pulse max.	(T3)	600 ms	600 ms
Pause min.	(T4)	160 ms	160 ms
Pause max.	(T5)	620 ms	620 ms
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		
Pulse max. + pause max.	(T2)		
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.30 Portugal

Tone Table						
						SIU SIUCO
						V3.1 V3.2
Date: 24/06/1989			Portugal: LKZ = 9			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	5	0			
1	Int. Dial	9	350 + 440	2	Continuous	-5
2	Ext. Dial	0	425	1	Continuous	-5
3	Special Dial	6	425		<u>200/300/200/300/200/800</u>	-5
4	Ring	1	425		<u>1000/4000</u>	-5
5	Busy	2	425		<u>160/480</u>	-5
6	Override	3	425		<u>200/300/200/1300</u>	-13,5
7	Camp On	4	425		<u>100/1000</u>	-13,5
8	Number Unobtainable	11	950/1400/1800		<u>340/340/340/1000</u>	-12
9	Data Call	8	1300		<u>600/1800</u>	-1
10	Pos. Acknowledge	-				
11	Congestion	-				
12	Conference	-				
13	Ext. Dial 2 (simulated)	-				
14	Neg. Acknowledge	-				
15		-				
23		-				
24	Conference Aux.	7	425		Continuous	-13,5
25		-				
26	LCR Tone	-	1800		<u>340/200/340/200/340/1000</u>	

Conference Tones							
						SIUCO SCC	V3.2 V3.3
Date: 30/03/1993			Portugal: LKZ = 9				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
200	Conf. Aux.	Cont.	Camp On	Cont.	Camp On	Cont.	Override
300	Pause					-	-
200	Conf. Aux.					-	-
Cont.	Quiet						

Dial Tone Receiver (DTR)			
		SIU SIUCO	V3.1 V3.2
Date: 22/06/1991	Portugal: LKZ= 9		
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		1	7
Type (time evaluation)		1	1
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	1200 ms	1200 ms
Pulse min.	(T2)	120 ms	120 ms
Pulse max.	(T3)	600 ms	600 ms
Pause min.	(T4)	200 ms	200 ms
Pause max.	(T5)	600 ms	600 ms
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		
Pulse max. + pause max.	(T2)		
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.31 Republic of South Africa

Tone Table						
					SIU SIUCO	V3.1 V3.2
Date: 01/06/1992		Republic of South Africa: LKZ = 6				
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	4	0			
1	Int. Dial	0	400	1,2	Continuous	-7
2	Ext. Dial	8	367 + 433		Continuous	-7
3	Special Dial	11	400		<u>40/40</u>	-7
4	Ring	9	367 + 433		<u>400/200/400/2000</u>	-7
5	Busy	1	400		<u>500/500</u>	-7
6	Override	2	400		<u>200/300/200/1300</u>	-9
7	Camp On	3	400		<u>100/15000</u>	-11
8	Number Unobtainable	7	400		<u>2500/500</u>	-7
9	Data Call					
10	Pos. Acknowledge	-				
11	Congestion	6	400		<u>250/250</u>	-7
12	Conference	-				
13	Ext. Dial 2 (simulated)					
14	Neg. Acknowledge	-				
15		-				
23	Conference Aux. 2	10	400		Continuous	-11
24	Conference Aux.	5	400		Continuous	-9
25		-				
26	LCR Tone	12	1800		<u>340/200/340/200/340/1000</u>	-7

Conference Tones							
					SIUCO SCC	V3.2 V3.3	
Date: 30/03/1993			Republic of South Africa: LKZ = 6				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
200	Conf. Aux.	Cont.	Camp On	Cont.	Camp On	Cont.	Override
300	Pause	-	-	-	-	-	-
200	Conf. Aux.	-	-	-	-	-	-
Cont.	Quiet	-	-	-	-	-	-

Dial Tone Receiver (DTR)			
		SIU SIUCO	V3.1 V3.2
Date: 03/09/1990	Republic of South Africa: LKZ = 6		
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		5	5
Type (time evaluation)		1	1
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	650 ms	650 ms
Pulse min.	(T2)	220 ms	220 ms
Pulse max.	(T3)	530 ms	530 ms
Pause min.	(T4)	220 ms	220 ms
Pause max.	(T5)	530 ms	530 ms
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		
Pulse max. + pause max.	(T2)		
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.32 Singapore

Tone Table						
						SIU SIUCO V3.1 V3.2
Date: 10/03/1993			Singapore: LKZ = M			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	-	0			
1	Int. Dial	9	400 + 450		Continuous	-7
2	Ext. Dial	0	425	1	Continuous	-5
3	Special Dial	8	480 + 620		Continuous	-5
4	Ring	11	400 + 450		<u>400/200/400/2000</u>	-12
5	Busy	3	425		<u>750/750</u>	-10
6	Override	4	425		<u>200/200/200/5000</u>	-16
7	Camp On	-				
8	Number Unobtainable	5	425		<u>2500/500</u>	-10
9	Data Call	-				
10	Pos. Acknowledge	-				
11	Congestion	1	425		<u>250/250</u>	-10
12	Conference	-				
13	Ext. Dial 2 (simualted)	-				
14	Neg. Acknowledge	-				
15	Erst-Freiton	10	400 + 450		Continuous	-12
23	Conference Aux. 2	6	425		Continuous	-10
24	Conference Aux.	7	425		Continuous	-16
25	-	-				
26	LCR Tone		1800		<u>340/200/340/200/340/1000</u>	-3

Conference Tones							
						SIUCO SCC V3.2 V3.3	
Date: 27/08/1993			Singapore: LKZ = M				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
4000	Congestion	Cont.	Camp On	Cont.	Camp On	200	Conf. Aux.
-	-	-	-	-	-	200	Pause
-	-	-	-	-	-	200	Conf. Aux.
-	-	-	-	-	-	Cont.	Override

Dial Tone Receiver (DTR)			
		SIUCO	V3.3+
Date: 13/09/1993	Singapore (Federal Republic of Germany): LKZ = 0		
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		1	1
Type (time evaluation)		1	2
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	500 ms	
Pulse min.	(T2)	160 ms	
Pulse max.	(T3)	250 ms	
Pause min.	(T4)	250 ms	
Pause max.	(T5)	440 ms	
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		800 ms
Pulse max. + pause max.	(T2)		1000 ms
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.33 Spain

Tone Table						
						SIU SIUCO
						V3.1 V3.2
Date: 24/06/1989			Spain: LKZ = 5			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	-	0			
1	Int. Dial	0	425		<u>200/300/200/300/200/800</u>	-6
2	Ext. Dial	1	425	1	Continuous	-6
3	Special Dial	8	425		<u>1000/100</u>	-6
4	Ring	2	425		<u>1500/3000</u>	-6
5	Busy	3	425		<u>200/200</u>	-6
6	Override	4	1400		<u>400/5000</u>	-28
7	Camp On	5	425		<u>600/200/600/1000</u>	-28
8	Number Unobtainable	11	950/1400/1800		<u>320/400/320/1000</u>	-13
9	Data Call	6/10	1300		<u>600/1800</u>	-2
10	Pos. Acknowledge	-				
11	Congestion	-				
12	Conference	-				
13	Ext. Dial 2 (simulated)	7	600	2	Continuous	-6
14	Neg. Acknowledge	-				
15		-				
23	Conference Aux. 2	10/6	1400		Continuous	-28
24	Conference Aux.	9	425		Continuous	-28
25		-				
26	LCR Tone	12	1800		<u>340/200/340/200/340/100</u>	-3

Conference Tones							
						SIUCO SCC	V3.2 V3.3
Date: 30/03/1993			Spain: LKZ = 5				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
400	Conf. Aux. 2	Cont.	Camp ON	Cont.	Camp On	Cont.	Override
5000	Pause	-	-	-	-	-	-
400	Conf. Aux. 2	-	-	-	-	-	-
Cont.	Quiet	-	-	-	-	-	-

Dial Tone Receiver (DTR)			
		SIU SIUCO	V3.1 V3.2
Date: 11.5.1999	Spain: LKZ = 5		
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		8	9
Type (time evaluation)		1	1
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	1200 975 ms	1200 / 975 ms
Pulse min.	(T2)	140 ms	140 ms
Pulse max.	(T3)	260 ms	260 ms
Pause min.	(T4)	140 ms	140 ms
Pause max.	(T5)	260 ms	260 ms
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		
Pulse max. + pause max.	(T2)		
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

Indication of T1 times for SIU type 1 / SIUCO

7.34 Sweden

Tone Table						
						SIU SIUCO
						V3.1 V3.2
Date: 17/5/1994			Sweden (Schweiz): LKZ = U			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	7	0			
1	Int. Dial	-				
2	Ext. Dial	9	425	1,2	Continuous	-6,5
3	Special Dial	6	425		<u>320</u> /20	-6,5
4	Ring	2	425		<u>1000</u> /5000	-6,5
5	Busy	3	425		<u>240</u> /260	-6,5
6	Override	4	1400		<u>100</u> /1500	-26,5
7	Camp On	-				
8	Number Unobtainable	11	950/1400/1800		<u>340</u> / <u>340</u> / <u>340</u> /1000	-6,5
9	Data Call	-				
10	Pos. Acknowledge	-				
11	Congestion	-				
12	Conference	-				
13	Ext. Dial 2 (simulated)	-				
14	Neg. Acknowledge	5	425		<u>260</u> /740	-6,5
15	-	-				
23	Conference Aux. 2	1			Continuous	-26,5
24	Conference Aux.	0	425		Continuous	-26,5
25	-	-				
26	LCR Tone	12	1800		<u>340</u> / <u>200</u> / <u>340</u> / <u>200</u> / <u>340</u> /1000	-3

Conference Tones							
						SIUCO SCC	V3.2 V3.3
Date: 17/05/1994			Sweden: LKZ = U				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
200	Conf. Aux.	200	Conf. Aux.	200	Conf. Aux.	100	Conf. Aux.
300	Pause	500	Pause	500	Pause	100	Pause
200	Conf. Aux.	200	Conf. Aux.	200	Conf. Aux.	Cont.	Override
Cont.	Quiet	Cont.	Quiet	Cont.	Quiet	-	-

Dial Tone Receiver (DTR)			
		SIUCO	V3.3+
Date: 13/09/1990	Sweden (Switzerland): LKZ = 2		
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		4	4
Type (time evaluation)		1	1
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	340 ms	340 ms
Pulse min.	(T2)	160 ms	160 ms
Pulse max.	(T3)	310 ms	310 ms
Pause min.	(T4)	160 ms	160 ms
Pause max.	(T5)	320 ms	320 ms
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		
Pulse max. + pause max.	(T2)		
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.35 Switzerland

Tone Table						
						SIU SIUCO
						V3.1 V3.2
Date: 22/04/1994			Switzerland: LKZ = 2			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	7	0			
1	Int. Dial	9	425	1,2	Continuous	-1
2	Ext. Dial					
3	Special Dial	8	425/425 + 340		1100/1100	-2,9*
4	Ring	2	425		1000/4000	-6
5	Busy	3	425		500/500	-6
6	Override	4	1400		200/2000	-13,5
7	Camp On	5	425		200/200/200/4000	-13,5
8	Number Unobtainable	11	950/1400/1800		340/340/340/1000	-6
9	Data Call	6	1300		600/1800	-1
10	Pos. Acknowledge	-				
11	Congestion	10	425		200/200	-6
12	Conference	-				
13	Ext. Dial 2 (simulated)	-				
14	Neg. Acknowledge	-				
15		-				
23	Conference Aux. 2	1	1400		Continuous	-13,5
24	Conference Aux.	0	425		Continuous	-13,5
25	-	-				
26	LCR Tone					

*: Einzel Pegel!

Conference Tones							
						SIUCO SCC	V3.2 V3.3
Date: 30/03/1993			Switzerland: LKZ = 2				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
200	Conf. Aux.	Cont.	Camp On	Cont.	Camp On	Cont.	Override
2000	Pause	-	-	-	-	-	-

Conference Tones							
						SIUCO SCC	V3.2 V3.3
Date: 30/03/1993			Switzerland: LKZ = 2				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
200	Conf. Aux.	-	-	-	-	-	-
Cont.	Quiet	-	-	-	-	-	-

Dial Tone Receiver (DTR)			
		SIUCO	V3.3+
Date: 13/09/1990		Switzerland: LKZ = 2	
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		4	4
Type (time evaluation)		1	1
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	340 ms	340 ms
Pulse min.	(T2)	160 ms	160 ms
Pulse max.	(T3)	310 ms	310 ms
Pause min.	(T4)	160 ms	160 ms
Pause max.	(T5)	320 ms	320 ms
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		
Pulse max. + pause max.	(T2)		
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.36 Thailand

Tone Table						
						SIU SIUCO V3.1 V3.2
Date: 6/7/1994			Thailand: LKZ = O			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	-	0			
1	Int. Dial	9	350 + 440		Continuous	-10
2	Ext. Dial	11	440 + 450		Continuous	-10
3	Special Dial	3	350		Continuous	-10
4	Ring Back	2	400		<u>1000</u> /3000	-8
5	Busy	10	480 + 620		<u>500</u> /500	-8
6	Override	4	440		<u>200</u> /200/ <u>200</u> /4000	-16
7	Camp On	6	440		<u>200</u> /30000	-16
8	Number Unobtainable	5	400		<u>100</u> /100/ <u>100</u> /100/ <u>100</u> /100/ <u>300</u> / <u>100</u>	-10
9	Data Call	-				
10	Pos. Acknowledge	1	440		Continuous	-10
11	Congestion	-				
12	Conference Specia Dial After Hookflash	8	350 + 440		<u>120</u> /120	-10
13	Ext. Dial 2 (simulated)	-				
14	Neg. Acknowledge	-				
15	First Ring Back	0	400		Continuous	-8
23	-	-				
24	Conference Aux.	7	440		Continuous	-16
25	-	-				
26	LCR Tone		1800		<u>340</u> /200/ <u>340</u> /200/ <u>340</u> /1000	

Conference Tones							
						SIUCO SCC V3.2 V3.3	
Date: 06/07/1994			Thailand: LKZ = O				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
1000	Conf. Aux.	200	Conf. Aux.	200	Conf. Aux.	200	Conf. Aux.
Cont.	Quiet	Cont.	Camp On	Cont.	Camp On	Cont.	Override

Conference Tones							
						SIUCO SCC	V3.2 V3.3
Date: 06/07/1994			Thailand: LKZ = 0				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-

Dial Tone Receiver (DTR)			
		SIUCO	V3.3+
Date: 13/09/1990		Thailand (South Afrika): LKZ = 6	
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		5	5
Type (time evaluation)		1	1
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	650 ms	650 ms
Pulse min.	(T2)	220 ms	220 ms
Pulse max.	(T3)	530 ms	530 ms
Pause min.	(T4)	220 ms	220 ms
Pause max.	(T5)	530 ms	530 ms
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		
Pulse max. + pause max.	(T2)		
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.37 Turkey

Tone Table						
						SIUX V3.4
Version: 9.4.1997			Turkey: LKZ = 17			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	-	0			
1	Internal Dial	0	450	1,2	Continuous	-10
2	Second Dial	10	350 + 450		Continuous	-10
3	Special Dial	6	450		<u>1000</u> /260	-10
4	Ring back	2	450		2000/4000	-10
5	Busy	4	450		<u>500</u> /500	-10
6	Override	9	450		<u>100</u> /10000	-15
7	Camp On	8	450		<u>100</u> /100/ <u>100</u> /5000	-15
8	Number Unobtainable	5	450		<u>200</u> /200	-10
9	Toll Break In	3	450		<u>200</u> /200/ <u>600</u> /200	-10
10	Pos. Acknowledge	-	-		-	-
11	Congestion, Overflow	1	450		<u>200</u> /200/ <u>200</u> /200/ <u>200</u> /200/ <u>600</u> /200	-10
12	Conference	-	-		-	-
13	Special Information	12	950/1400/1800		<u>340</u> / <u>340</u> / <u>340</u> /1000	-10
14	Special Confirmation	11	450		<u>40</u> /40	-10
15	Howler	-	-		-	-
23	Test	13	804		Continuous	-4
24	Conference Aux.	7	450		Continuous	-15
25	-	-	-		-	-
26	LCR Tone	14	1800		<u>340</u> /200/ <u>340</u> /200/ <u>340</u> /1000	-10

Conference Tones							
						SIUX	V3.4
Date: 9.4.1997			Turkey: LKZ = 17				
Conference		Camp On		Night Subscriber camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
200	Conf. Aux.	Cont.	Camp On	Cont.	Camp On	100	Conf. Aux.
Cont.	Quiet					1000	Quiet
						Cont.	Override

Conference Tones							
						SIUX	V3.4
Date: 9.4.1997			Turkey: LKZ = 17				
Conference		Camp On		Night Subscriber camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone

Dial Tone Receiver (DTR)			
Datw: 9.4.1997		Turkey: LKZ = 17	
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		4	4
Type (time evaluation)		1	1
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	800	800
Pulse min.	(T2)	150	150
Pulse max.	(T3)	700	700
Pause min.	(T4)	150	150
Pause max.	(T5)	700	700

7.38 Hungary

Tone Table						
						SIU SIUCO
						V3.3+ V3.3+
Date: 15/11/1994			Hungary: LKZ = 10			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	-	0			
1	Int. Dial	-				
2	Ext. Dial	0	425	1,2	Continuous	-3
3	Special Dial	8	425 + 400		Continuous	-8
4	Ring	1	425		<u>1240</u> /3760	-3
5	Busy	2	425		<u>300</u> /300	-3
6	Override	3	425		<u>300</u> /300/ <u>300</u> /1500	-11
7	Camp On = Conference	4	425		<u>40</u> /1960	-11
8	Number Unobtainable = Hinweiston (SIT)	5	950/1400/1800		<u>340</u> / <u>340</u> / <u>340</u> /1000	-3
9	Data Call	-				
10	Pos. Acknowledge	-				
11	Warteton	6	425		<u>120</u> /120/ <u>120</u> /500	-3
12	Conference	-				
13	Ext. Dial 2 (simulated)	-				
14	Neg. Acknowledge	-				
15	Test	7	900		Cont.	-4,5
23	Alarm	10	1000		Cont.	+0,66
24	Conference Aux.	9	425		Cont.	-11
25	-	-				
26	LCR Tone	-	1800		<u>340</u> /200/ <u>340</u> /200/ <u>340</u> /1000	

Testton geht nicht über SLMA, sondern über Satz (Relativpegel DA = -1 dBr bei
Anlogsatz, 0 dBr bei Digitalsatz).
Forderung ist -5 dBm +/- 0,5 dB.

Conference Tones							
						SIUCO SCC	V3.3+ V3.3
Date: 15/11/1994				Hungary: LKZ = 10			
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
40	Conf. Aux.	40	Conf. Aux.	40	Conf. Aux.	300	Conf. Aux.
40	Pause	40	Pause	40	Pause	300	Pause
Cont.	Camp On	Cont.	Camp On	Cont.	Camp On	Cont.	Override
-	-	-	-	-	-	-	-

Dial Tone Receiver (DTR)			
		SIUCO	V3.3+
Date: 15/11/1994		Hungary: LKZ = 10	
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		1	1
Type (time evaluation)		1	1
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	500 ms	500 ms
Pulse min.	(T2)	240 ms	240 ms
Pulse max.	(T3)	360 ms	360 ms
Pause min.	(T4)	240 ms	240 ms
Pause max.	(T5)	360 ms	360 ms
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		
Pulse max. + pause max.	(T2)		
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.39 USA

Tone Table						
						SIU SIUCO
						V3.1 V3.2
Date: 21/09/1993			USA (Only μ -Law): LKZ = K			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Test	0	1004		Continuous	-14
1	Dial, Recall Dial	10	350 + 440		Continuous	-11
2	LDN Call Ident.	1	480		Continuous	-13
3	Special Dial	5	350 + 440		<u>400</u> /100	-11
4	Called Party	2	2100		Continuous	-10
5	Busy	7	480 + 620		<u>500</u> /500	-21
6	Busy Override Injection Override	3	440		<u>260</u> /14000	-24
7	Camp On	9	480 + 620		Continuous	-21
8	Audible Ring	6	440 + 480		<u>1000</u> / <u>3000</u>	-16
9	Reorder	8	480 + 620		<u>240</u> /260	-21
10	Operator Call Identification	4	440	1,2	Continuous	-13
11	Message Waiting Dial Tone	11 12	350 + 440		<u>1240</u> /260	-11
12	Busy Override Injection Aux. Tone	12 11	440		Continuous	-24
13	Special Audible Ring	13	440+480 / 440 /0		<u>1000</u> / <u>200</u> /3000	-13/-16
14	Intercept	14	440 / 620 / 0		<u>240</u> / <u>240</u> /0	-17
15	Quiet Idle Channel Code	-	0		Continuous	---
23	-	-				
24	-	-				
25	-	-				
26	LCR Tone	-	1800		<u>340</u> / <u>200</u> / <u>340</u> / <u>200</u> / <u>340</u> /1000	

LCR tone is not yet contained in code

Conference Tones							
						SIUCO SCC	V3.2 V3.3
Date: 27/08/1993				USA: LKZ = K			
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
500	Busy Override Inj. Aux.	-	-	-	-	500	Busy Override Inj. Aux.
Cont.	Idle	-	-	-	-	6000	Pause
-	-	-	-	-	-	Cont.	Busy Override Inj.
-	-	-	-	-	-	-	-

NOTE: File PZJSTONK is not suitable for SIU type 1, but for SIU type 4 (USA).
File PZJETONK is used for a special USA-SIUCO, or for SIUX, SIUCX.

Dial Tone Receiver (DTR)			
		SIUCO	V3.3+
Date: 25/07/1991		USA: LKZ = K	
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		2	2
Type (time evaluation)		1	1
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	650 ms	650 ms
Pulse min.	(T2)	240 ms	240 ms
Pulse max.	(T3)	520 ms	520 ms
Pause min.	(T4)	240 ms	240 ms
Pause max.	(T5)	520 ms	520 ms
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		
Pulse max. + pause max.	(T2)		
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.40 Vietnam

Tone table						
						SIUCO E2.0
Date: 20.5.1999			Vietnam: LKZ = 19			
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle channel	-	0			
1	Int. Dial	0	425		Continuous	-10
2	Ext. Dial	-		1		
3	Special Dial	8	400 + 425		Continuous	-10
4	Ring back	2	425		<u>1000</u> /4000	-10
5	Busy	3	425		<u>500</u> /500	-10
6	Intrusion	4	425		<u>200</u> /300/ <u>200</u> /1300	-15
7	Call waiting	5	425		<u>400</u> /9000	-15
8	Number Unobtainable	11	950/1400/1800		<u>320</u> / <u>320</u> / <u>320</u> /1000	-10
9	Data call	-				
10	Recorder warning	1	1400		<u>400</u> /15000	-15
11	Congestion	6	425		<u>200</u> / <u>200</u> / <u>200</u> / <u>200</u> / <u>200</u> /1000	-10
12	-	-				
13	Ext. Dial 2	-				
14	-	-				
15	-	-				
23	-	-				
24	Conference Aux.	9	425	2	Continuous	-15
25		-				
26	LCR tone	7	1800		<u>340</u> / <u>200</u> / <u>340</u> / <u>200</u> / <u>340</u> /1000	-10

Conference Tones							
						SIUX	E2.0
Date: 20.5.1999			Vietnam: LKZ = 19				
Conference		Camp on		Night Camp On		Intrusion	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
200	Conf. Aux.	Cont.	Camp On	Cont.	Camp On	Cont.	Override
300	Pause	-	-	-	-	-	-
200	Conf. Aux.	-	-	-	-	-	-
Cont.	Quiet	-	-	-	-	-	-

NOTE: The receiver table used for Vietnam is the same as for China:
PZJERECC. MFV / DTMF level as for BRD (FRG): -7.2 / -5.2 dBm0 (sum +0.8 dBm0)

7.41 Yugoslavia

Tone table						
						SIUX V3.5
Date: 5.8.1998		Yugoslavia: LKZ = 29				
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
0	Idle Channel	-	0			
1	Int. Dial	8	425	1,2	Dauer	-3
2	Ext. Dial	9	425		200/300/700/800	-3
3	Waiting (Warning back)	3	425		100/5000	-3
4	Ring back	10	425		1000/4000	-3
5	Busy	0	425		500/500	-3
6	Intrusion	1	425		200/800	-7
7	Warning = Camp On (Call waiting)	2	425		200/5000	-7
8	Number Unobtainable	11	950/1400/1800		340/340/340/1000	-3
9	Special Dial TOne	12	425 / 425 + 340		1000 / 1000	-3*
10	Pos. Quitt.-Ton	5	425		500/1000	-3
11	Congestion	6	425		200/200	-3
12	Conference	-				
13	Checking Tone	-				
14	Neg. Quitt.-Ton	-				
15	-	-				
23	Alarmton	-				
24	Conference Aux. Tone	4	425		Dauer	-7
25	-	-				
26	LCR-Ton	12	1800		340/200/340/200/340/1000	-3

* Special Dial Tone Pegel = - 3 dBm0 pro Frequenz, Summenpegel = 0 dBm0

Conference Tones							
						SIUX V3.5	
Date: 27.7.1998			Yugoslavia (YUG = Serbien): LKZ = 29				
Conference Tone		Camp On		Night Camp On		Intrusion	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
500	Conf. Aux	Dauer	Camp On	Dauer	Camp On	Dauer	Intrusion
Dauer	Ruhe	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-

Dial Tone Receiver (DTR)			
		SIUX	V3.5
Date: 27.7.1998	Yugoslavia (YUG = Serbien): LKZ = K		
		1st DTR and 2nd DTR	3rd DTR and 4th DTR
Mode (filter selection)		1	1
Type (time evaluation)		1	1
Times type 1 (continuous tone / busy tone)			
Continuous tone min.	(T1)	600 ms	600 ms
Pulse min.	(T2)	400 ms	400 ms
Pulse max.	(T3)	590 ms	590 ms
Pause min.	(T4)	400 ms	400 ms
Pause max.	(T5)	600 ms	600 ms
Times type 2 (internal dial tone / busy tone)			
Long pause	(T1)		
Pulse max. + pause max.	(T2)		
Times type 3 (2nd AWT Belgium, measurement pulse - pause - pulse)			
Pulse max. + pause max.	(T1)		
Pulse min.	(T2)		
Pause min.	(T3)		
Pulse max. - pulse min.	(T4)		
Pause max. - pause min.	(T5)		
Disconnect time	(T6)		

7.42 Taiwan

Tone table						
					RTMX / SoftGate	V10R1
Date: 23.11.2022		Taiwan: LKZ = 30				
TSL	Tone	TOG	Frequency Hz	RTO	Timing pulse / pause in ms	Level dBm0
0	Idle Channel	-	0			
1	Int. Dial	8	425	2	Continuous	-13
2	Ext. Dial	1	350 + 440	1	Continuous	-13
3	-	-	-		-	-
4	Ring	10	440 + 480		1000/2000	-19
5	Busy	0	425		500/500	-24
6	Override	1	440 + 480		100/4900	-19

Tone table						
					RTMX / SoftGate	V10R1
Date: 23.11.2022		Taiwan: LKZ = 30				
TSL	Tone	TOG	Frequency Hz	RTO	Timing <u>pulse</u> / pause in ms	Level dBm0
7	Congestion	2	480 + 620		250/250	-24
8	Call Waiting	3	440 + 480		150/150/150/4000	19
9	-	-	-		-	-
10	-	-	-		-	-
11	-	-	-		-	-
12	-	-	-		-	-
13	-	-	-		-	-
14	-	-	-		-	-
15	-	-	-		-	-
23	-	-	-		-	-
24	Auxiliary Tone	9	440 + 480		Continuous	-19
25	-	-	-		-	-
26	-	-	-		-	-

Conference Tones							
RTMX / SoftGate						V10R1	
Date: 23.11.2022			Taiwan: LKZ = 39				
Conference		Camp On		Night Camp On		Override	
Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone	Time (ms)	Tone
200	Auxiliary Tone	Cont.	Call Waiting	Cont.	Call Waiting	Cont.	Override
300	Pause	-	-	-	-	-	-
200	Auxiliary Tone	-	-	-	-	-	-
-	-	-	-	-	-	-	-

Taiwan

Index

A

Announcements 31
Australia 41
Austria 89

B

Belgium 43
Brazil 45

C

Cameroon 77
China 49
Commonwealth of Independent States (CIS) 63
Conference 25
Corea 79
Country codes 5
Country Tables 41
CP-Tone 0 - 8 10
CP-Tone 10 18
CP-Tone 12 - 15 18
CP-Tone 16 - 19 20
CP-Tone 9 13
CP-Tone A - H 13
CP-Tone I - Q 15
CP-Tone R - W 18
CP-Tone-Tables 10
Czech Republic 51

D

Denmark 53
DTMF Level Country Table 36
DTMF Receivers 35
DTMF Transmit Level Table 36

E

Evaluation Processes for Dial Tone Receivers 26

F

Federal Republic of Germany 47
Filter Selection for Dial Tone Receivers 25
Finland 55
France 57

G

General 5
Great Britain 59
Greece 61

H

Hungary 115

I

India 69
Indonesia 67
Introduction 5
Israel 71
Italy 73

J

Japan 75

M

Malaysia 81
Mexico 85
Morocco 83
Music-on-hold 35

N

Netherlands 87

O

Oman 91
Other Functions 35

P

Pakistan 93
Philippines 95
Poland 97
Portugal 99

R

Receiver Variants 29
Republic of South Africa 101
RTO Test 25

S

Singapore 103
SIU Functions 25
Spain 105
Status 5
Sweden 107
Switzerland 109

T

Test Receiver 35
Test Transmitter 35
Thailand 111

Index

Tone and Receiver Initializations 6
Turkey 113

U

USA 117

V

Vietnam 119

Y

Yugoslavia 121

